

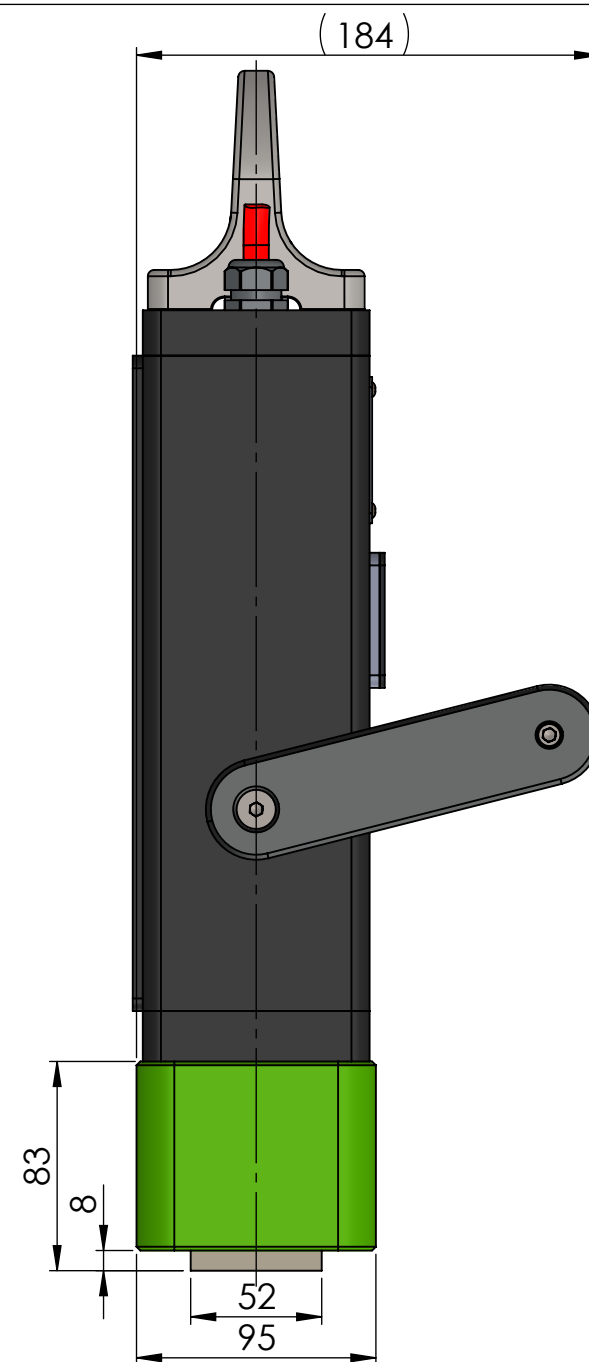


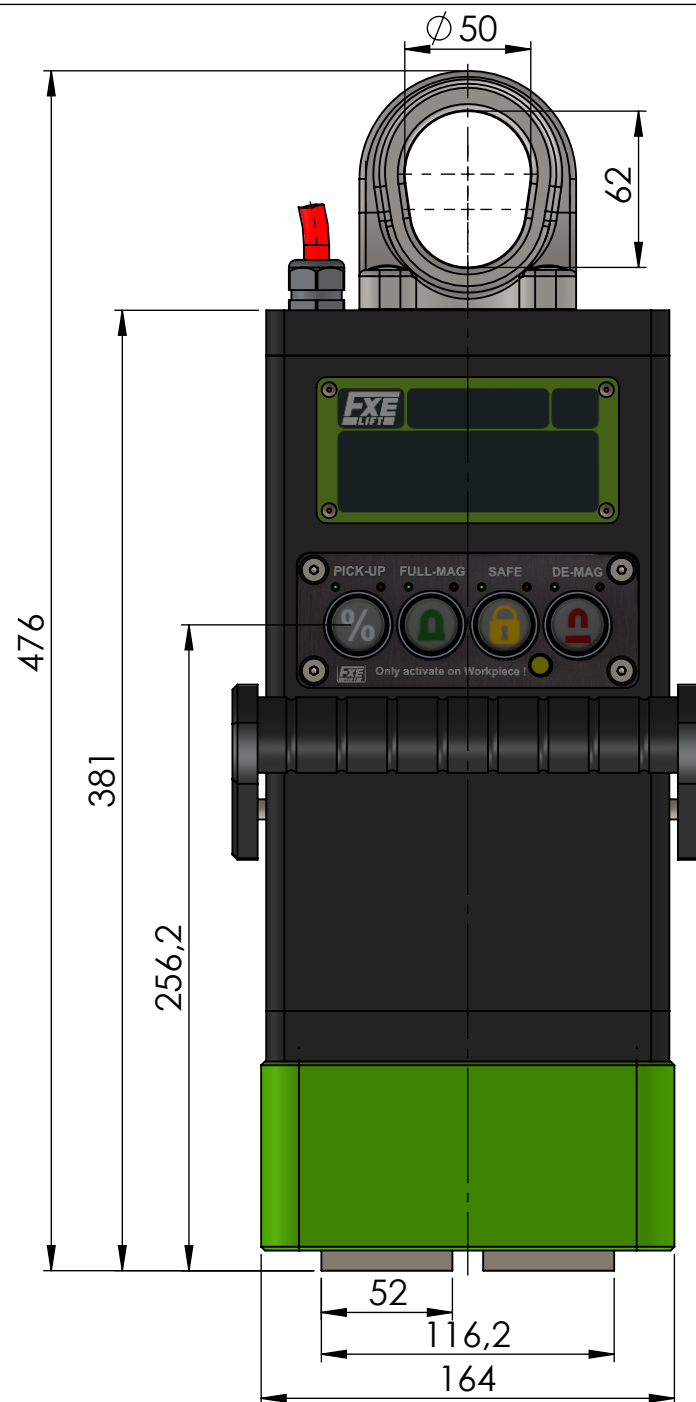

2m cable/
optional Spiral cable 1-5m

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

Adjustable handle


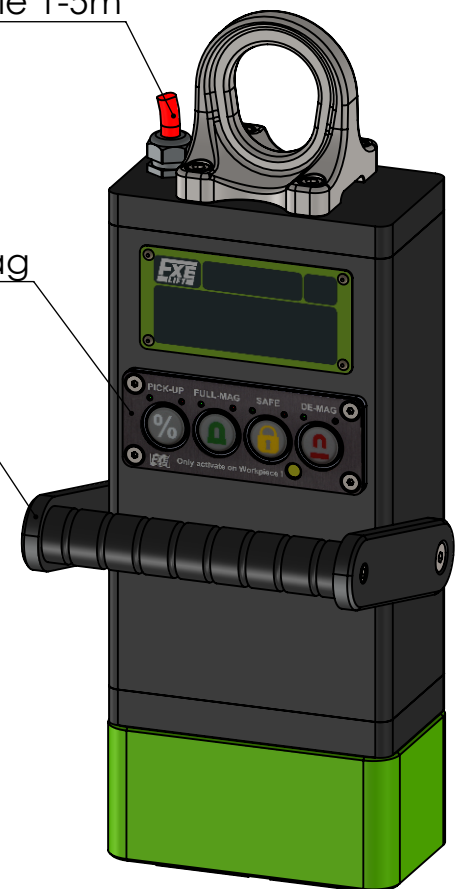


Specification FXE 150-50+

Nominative Force: 7,6kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 150kg
1,1kVA	
U: 400V Pulse	Protection Class IP 65
R: 25,5Ω	Protectiv Earth SK I


Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	1000	500	30
>=6mm	1200	600	60
>=8mm	1200	600	80
>=10mm	1200	600	100
>=15mm	1200	600	150

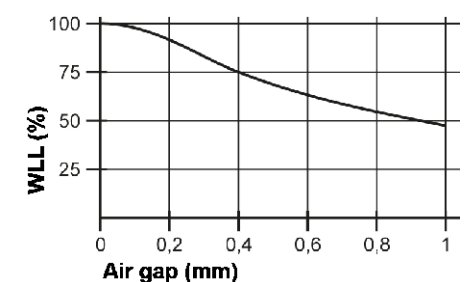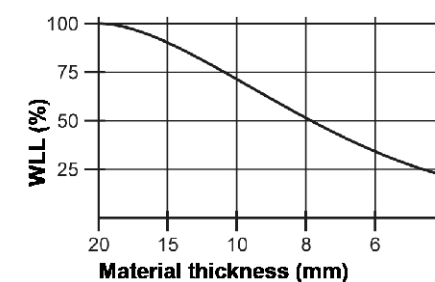

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 17kg

drawing no.: 0017580

description: **FXE 150-50+**

part no.: 10600152 sheet 1 / 1
A3

scale: 1:3 Status: Freigegeben

FLAIG
Magnetsysteme
www.flraig-te.de

rev. change date name