

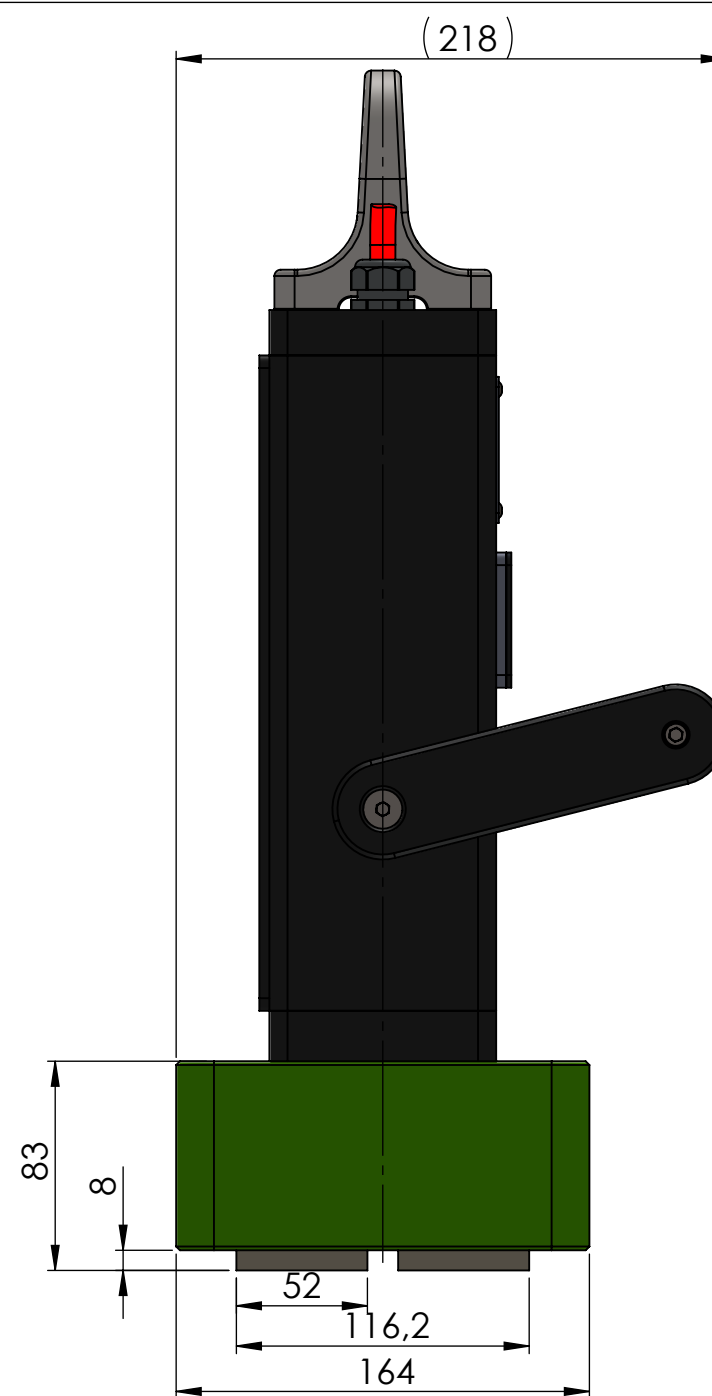
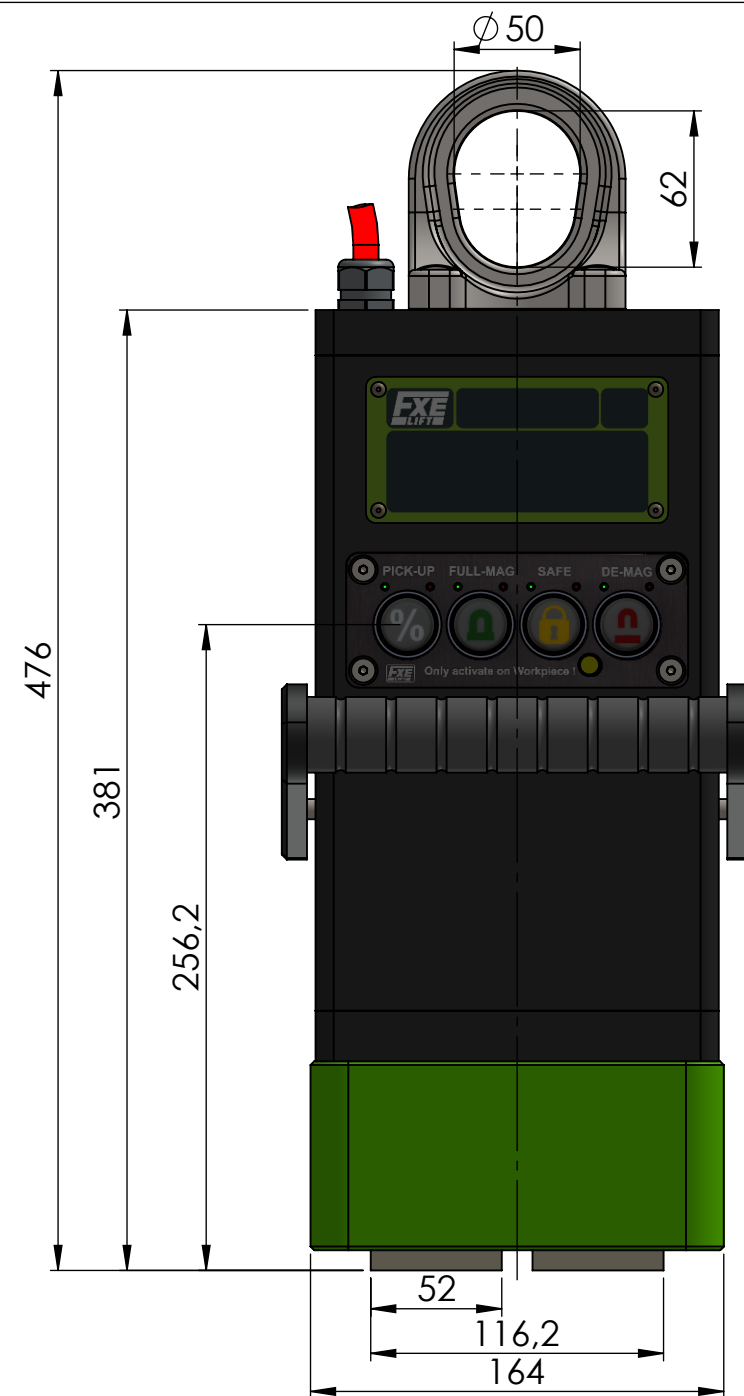
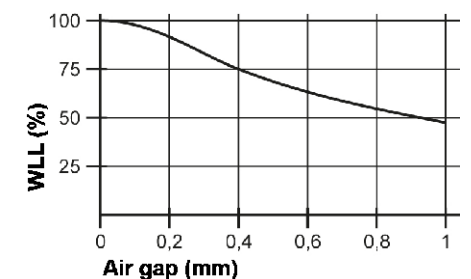


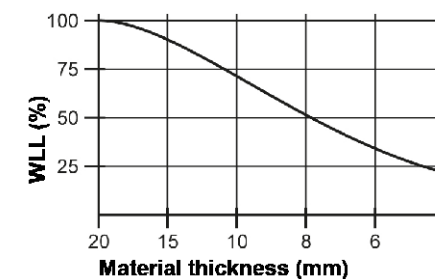

2m cable/
optional Spiral cable 1-5m

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

Adjustable handle

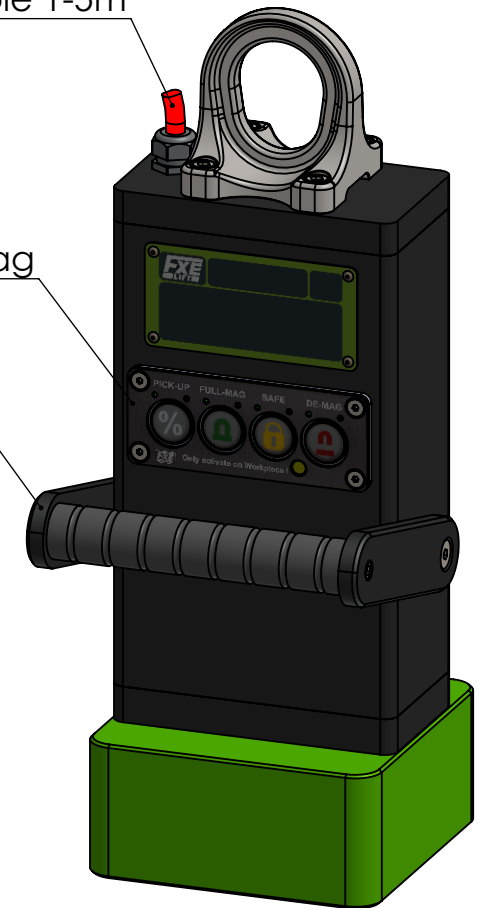

Specification FXE 300-50+


Nominative Force: 15,2kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 300kg
2,1kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 12,8Ω	Protectiv Earth SK I

Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	1800	1500	70
>=6mm	2000	1500	140
>=8mm	2000	1500	200
>=10mm	2000	1500	280
>=15mm	2000	1500	300

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 26.00

drawing no.: 0015352

description: FXE 300-50+

part no.: 10600302

sheet 1 / 1

A3

scale: 1:3 Status: Freigegeben

FLAIG
Magnetsysteme
www.flaign-te.de

02	Steuersäule	20.10.2023	TW
rev.	change	date	name