

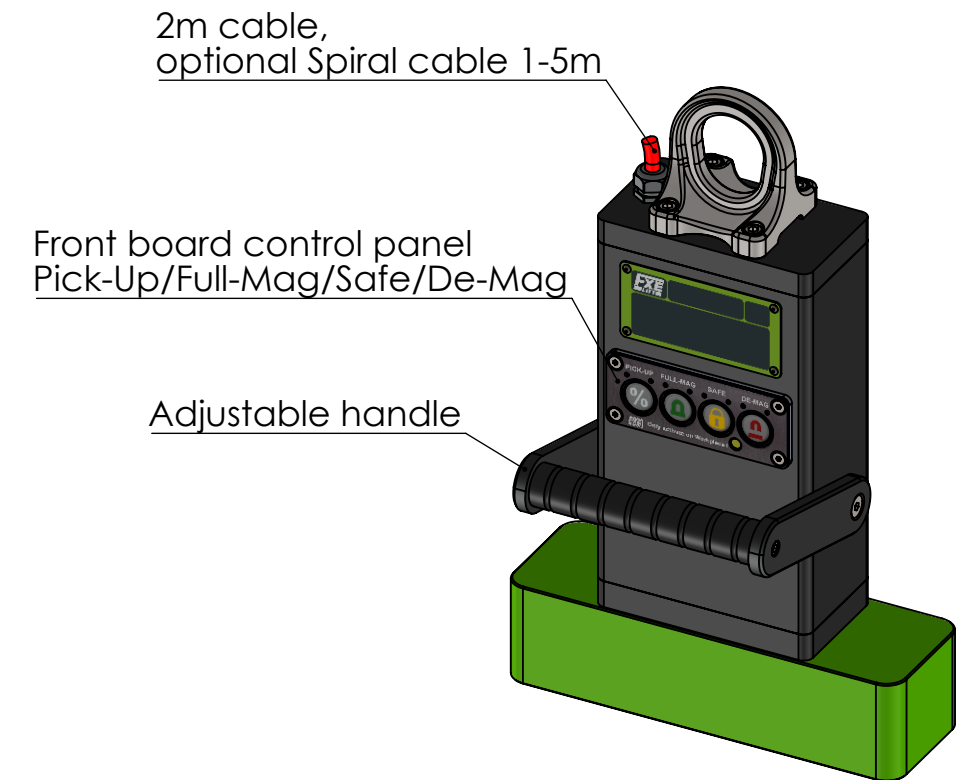
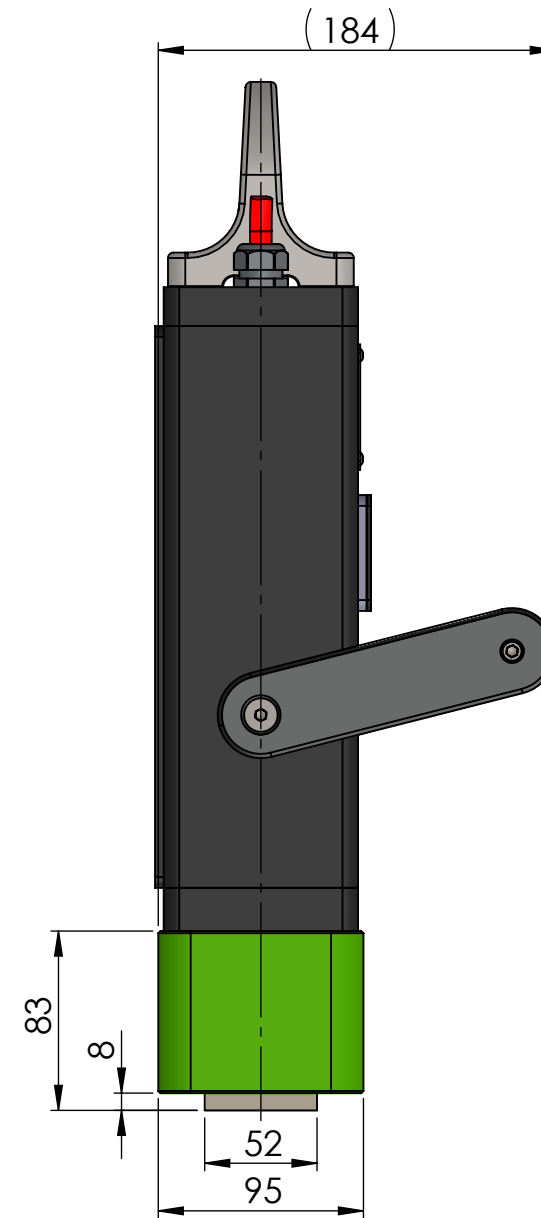
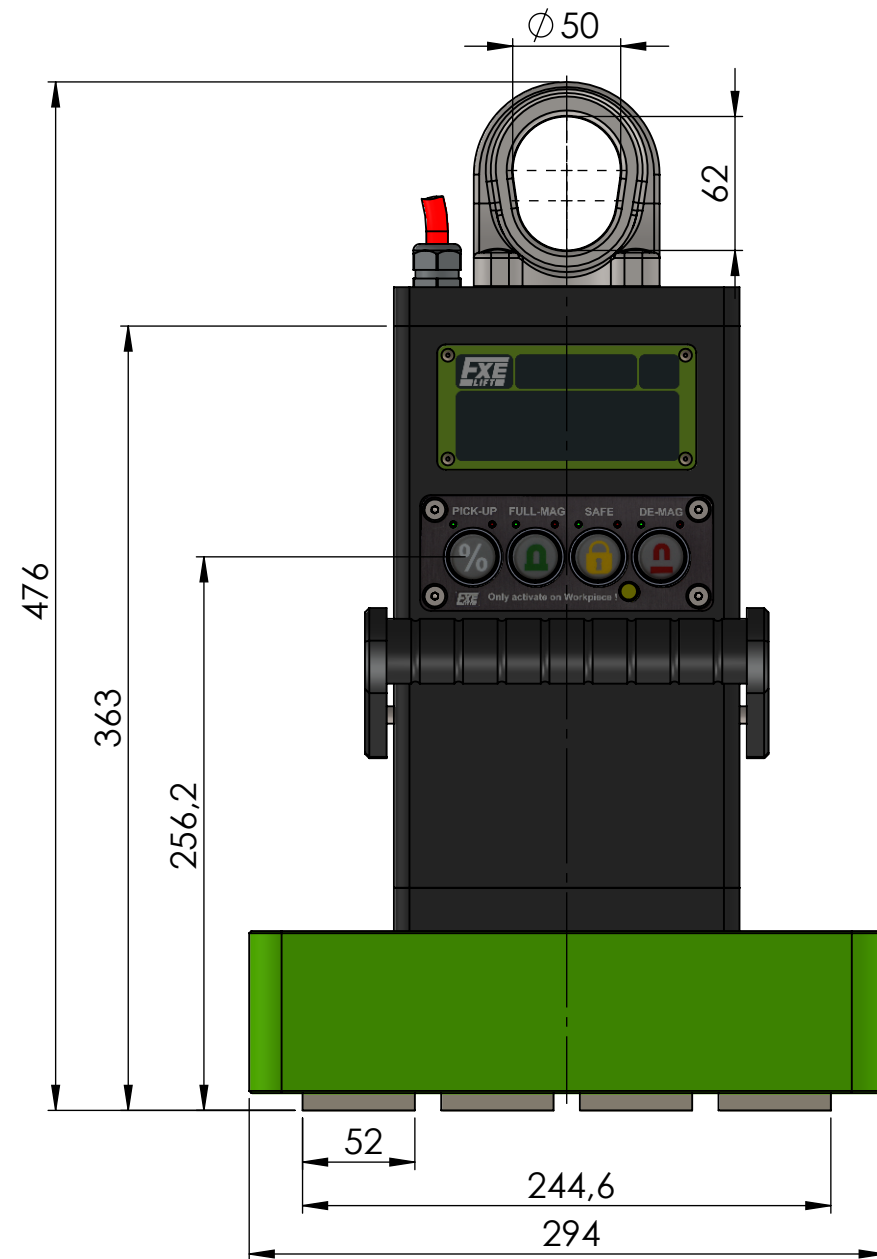


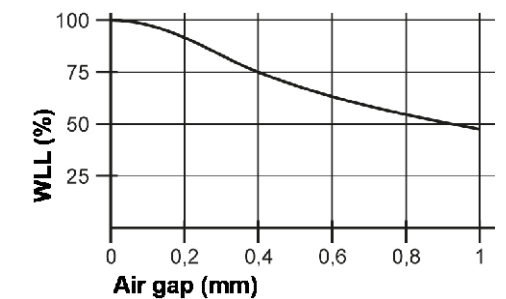


Specification FXE-L 400-50+

Nominative Force: 15,2kN	lifting capacity EN 13155/WLL		
Materialthickness >15mm (100%)	WLL= 400kg		
2,1 kVA			
U: 380-480V Pulse	Protection Class IP 65		
R: 12,8Ω	Protectiv Earth SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	1800	1000	70
>=6mm	2000	1000	140
>=8mm	2000	1000	200
>=10mm	2500	1000	250
>=15mm	3000	1000	400

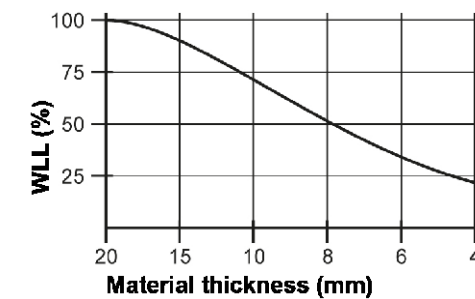

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 23.00

drawing no.: 0014517

description: FXE-L 400-50+

part no.: 10600411 sheet 1 / 1 A3

scale: 1:3.5 Status: Freigegeben

FLAIG
Magnetsysteme
www.flraig-te.de

rev.	change	date	name
02	Tabellenwerte	24.10.2023	TW