
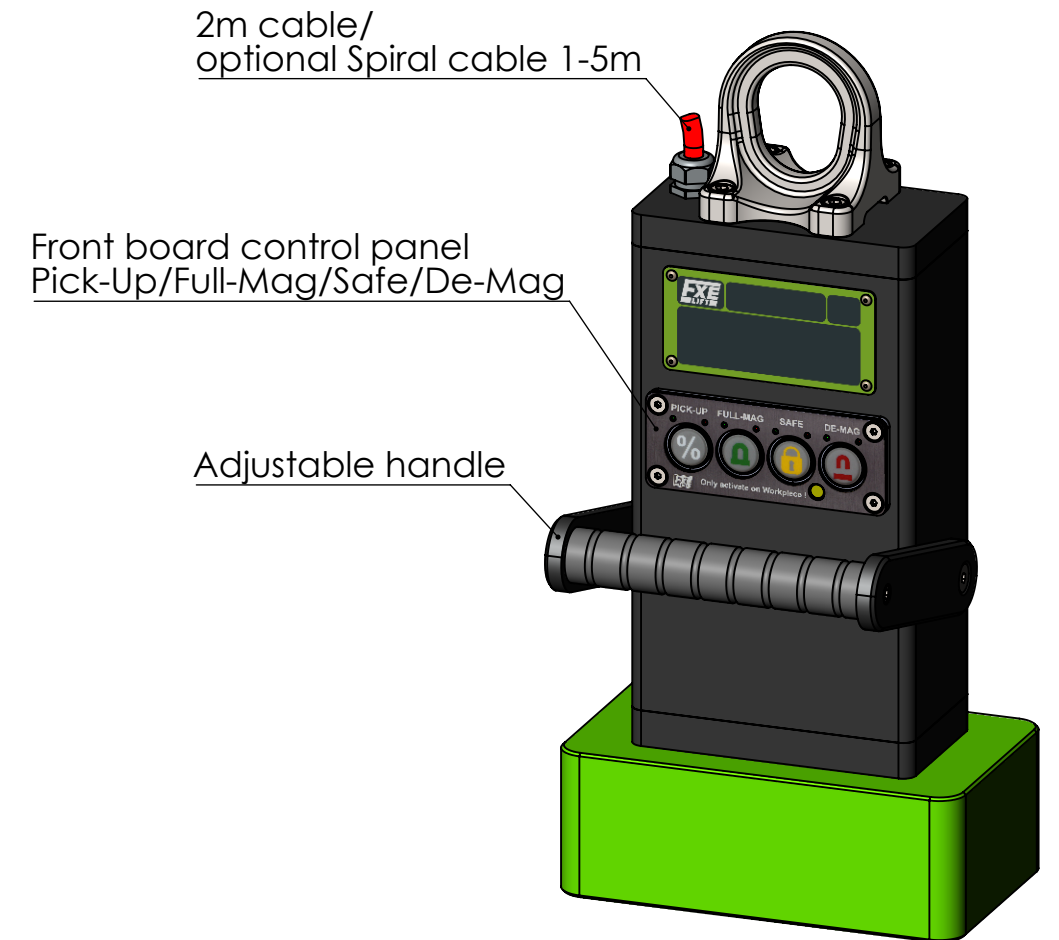
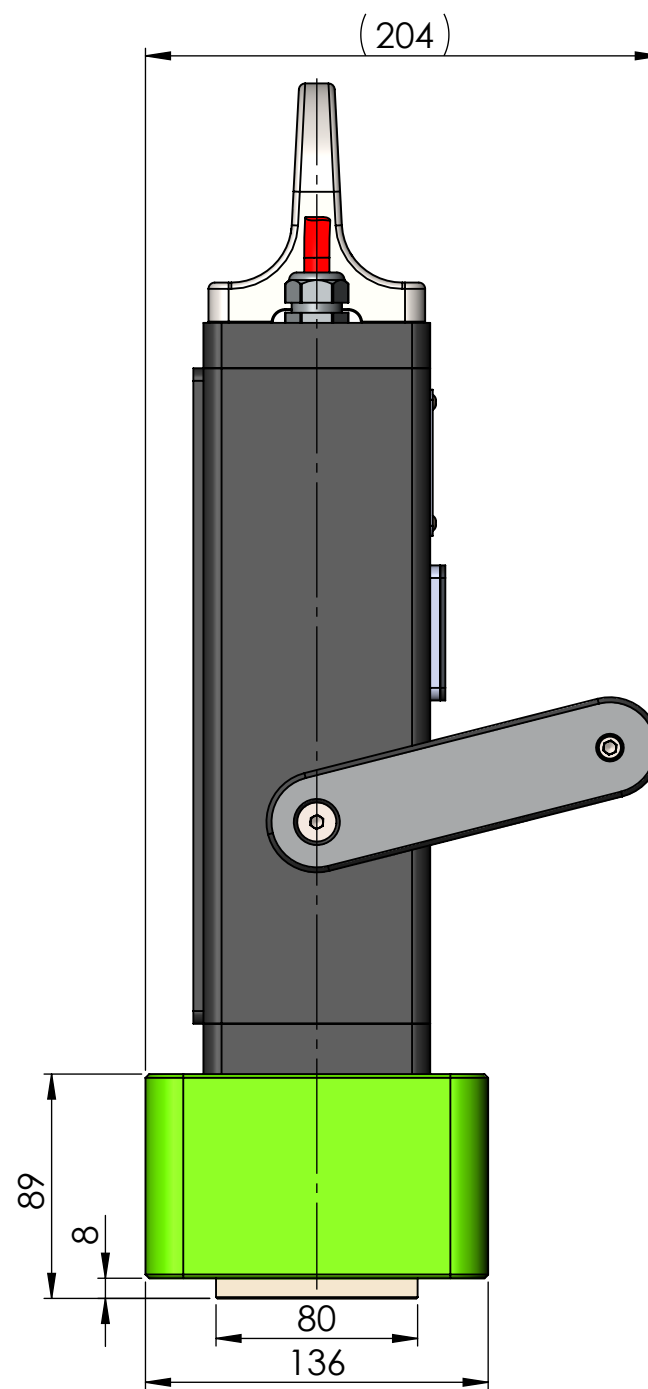
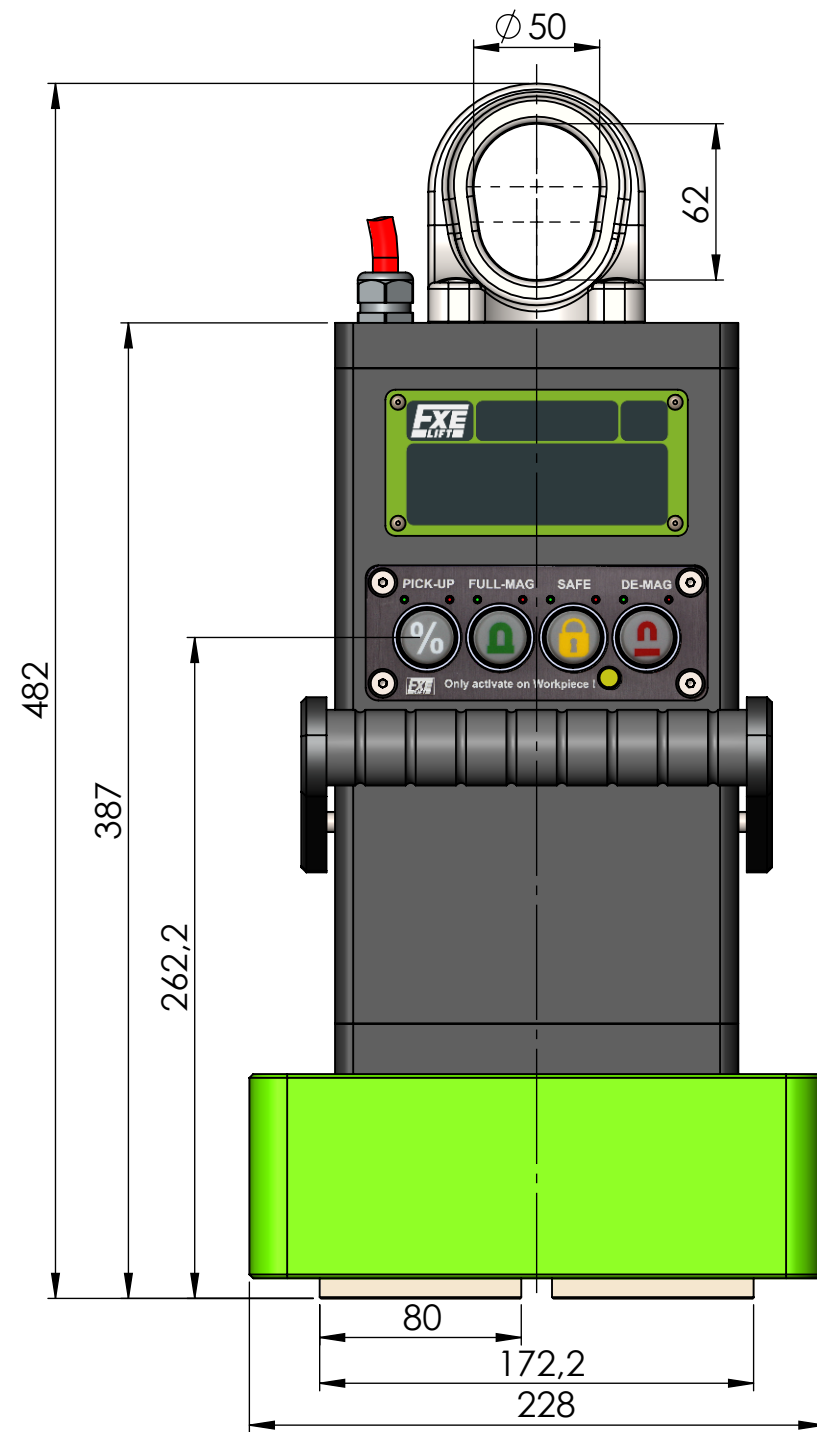



Specification FXE 500-80

Nominative Force: 18kN	lifting capacity EN 13155/WLL		
Materialthickness >25mm (100%)	WLL= 500kg		
4,7kVA			
U: 380-480V Pulse	Protection Class IP 65		
R: 5,7Ω	Protectiv Earth SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=8mm	1200	600	80
>=10mm	1500	1000	160
>=15mm	1500	1000	240
>=25mm	1500	1000	500

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material:	weight: 31.00
drawing no.:	0014522
description:	FXE 500-80
part no.:	10600502
scale: 1:3	Status: Freigegeben

rev.	change	date	name
02	Tabellenwerte	24.10.2023	TW

FLAIG
Magnetsysteme
www.flraig-te.de