
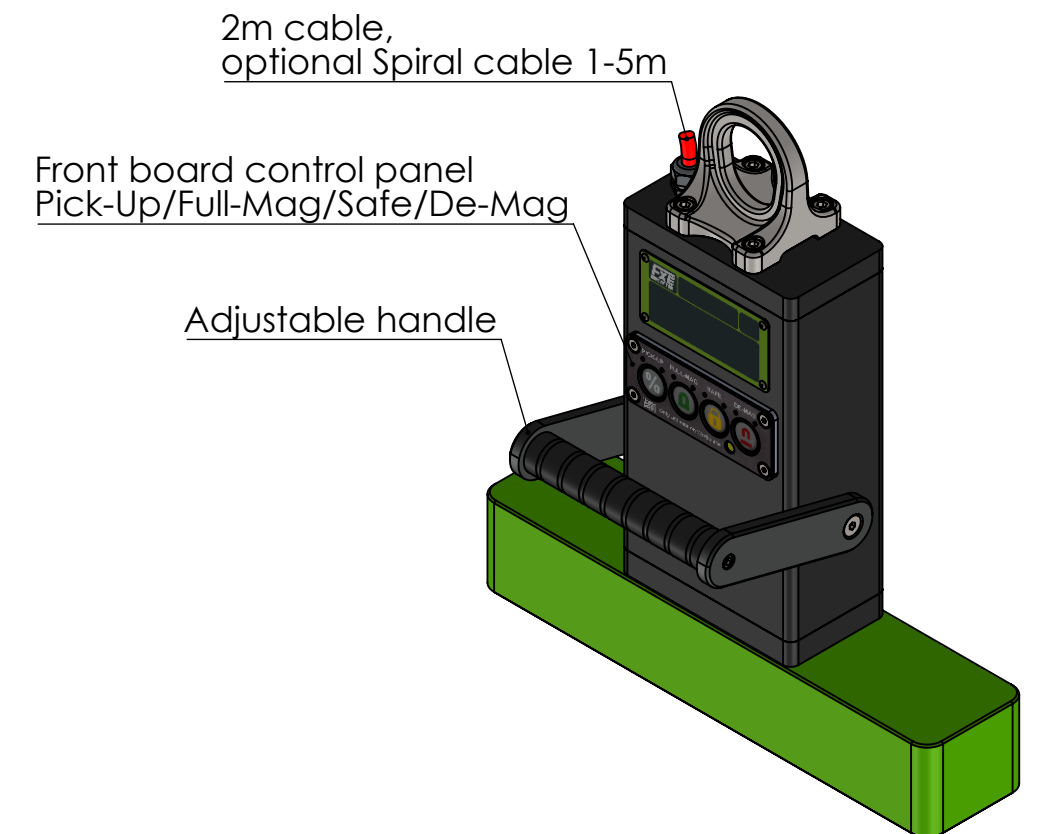
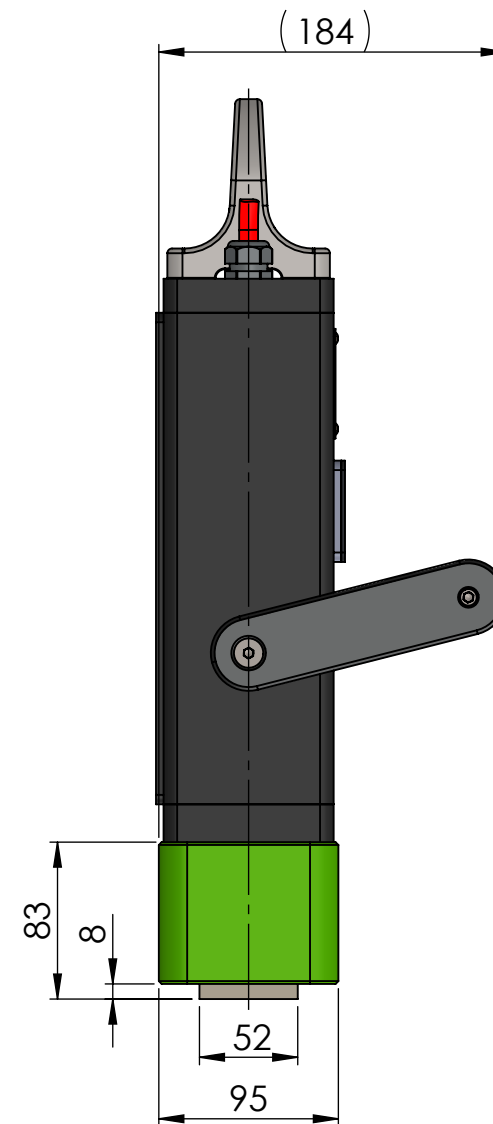



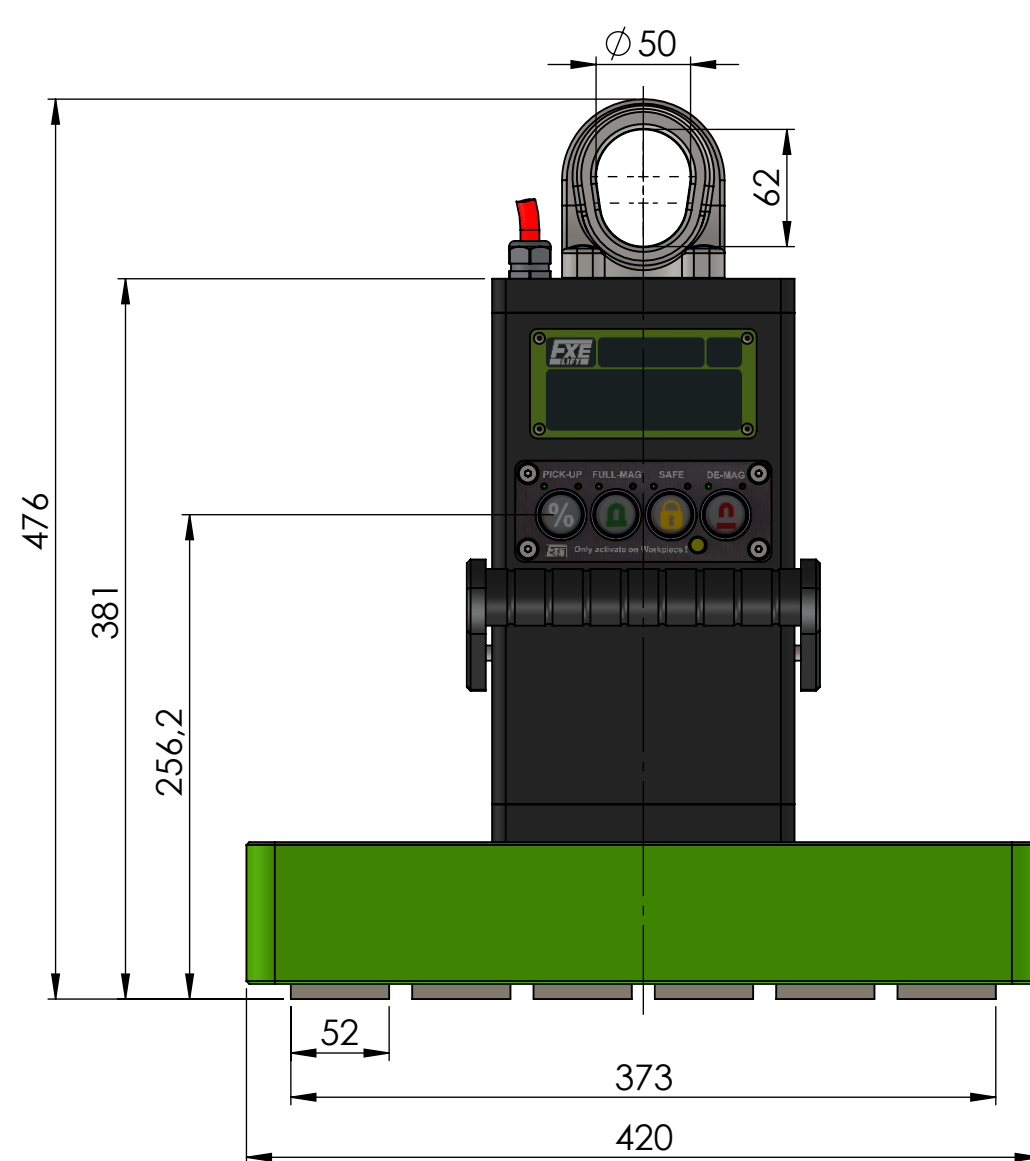


Specification FXE-L 600-50+

Nominative Force: 22,8kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 600kg
3,5 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 7,8Ω	Protectiv Earth SK I


Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	2000	1000	100
>=6mm	2500	1000	200
>=8mm	2500	1000	300
>=10mm	3000	1000	350
>=15mm	4000	1000	600

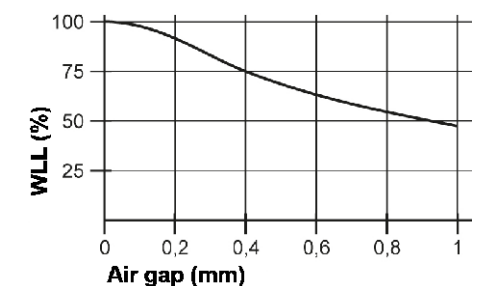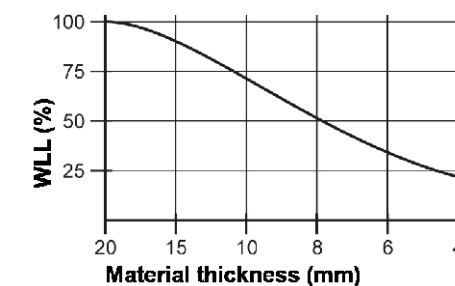

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 31kg

drawing no.: 0017774

description: FXE-L 600-50+

part no.: 10600611 sheet 1 / 1 A3

rev.	change	date	name
02	Tabellenwerte	23.10.2023	TW

FLAIG
Magnetsysteme
www.flaign-te.de

scale: 1:4 Status: Freigegeben