
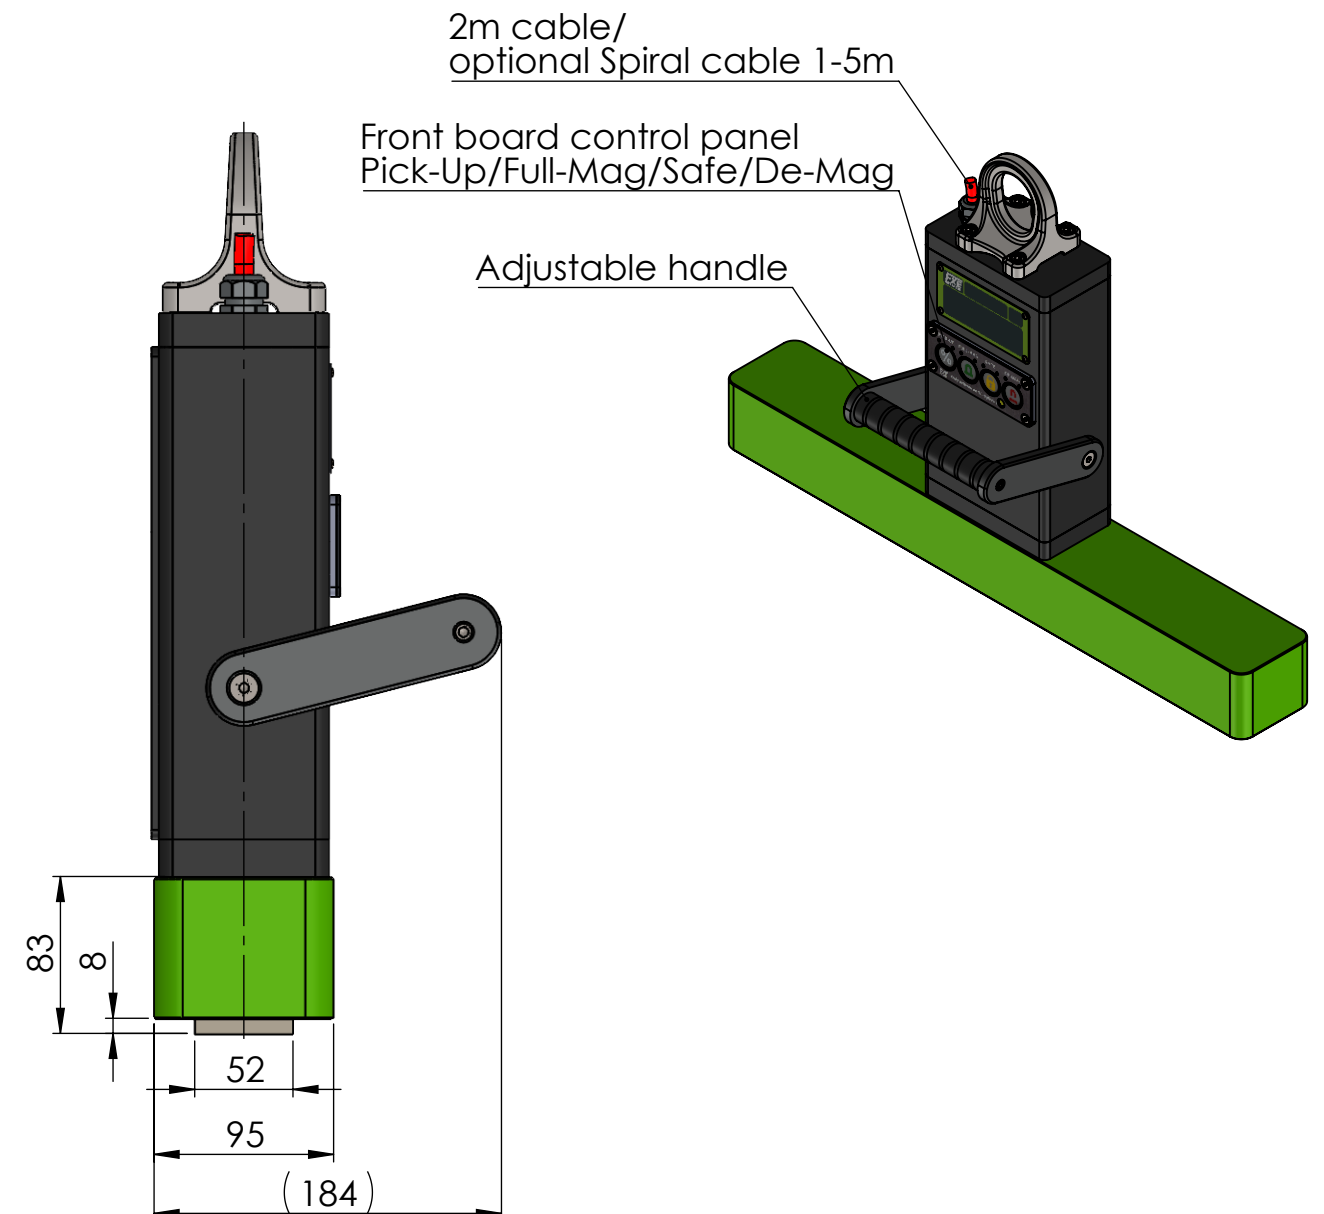



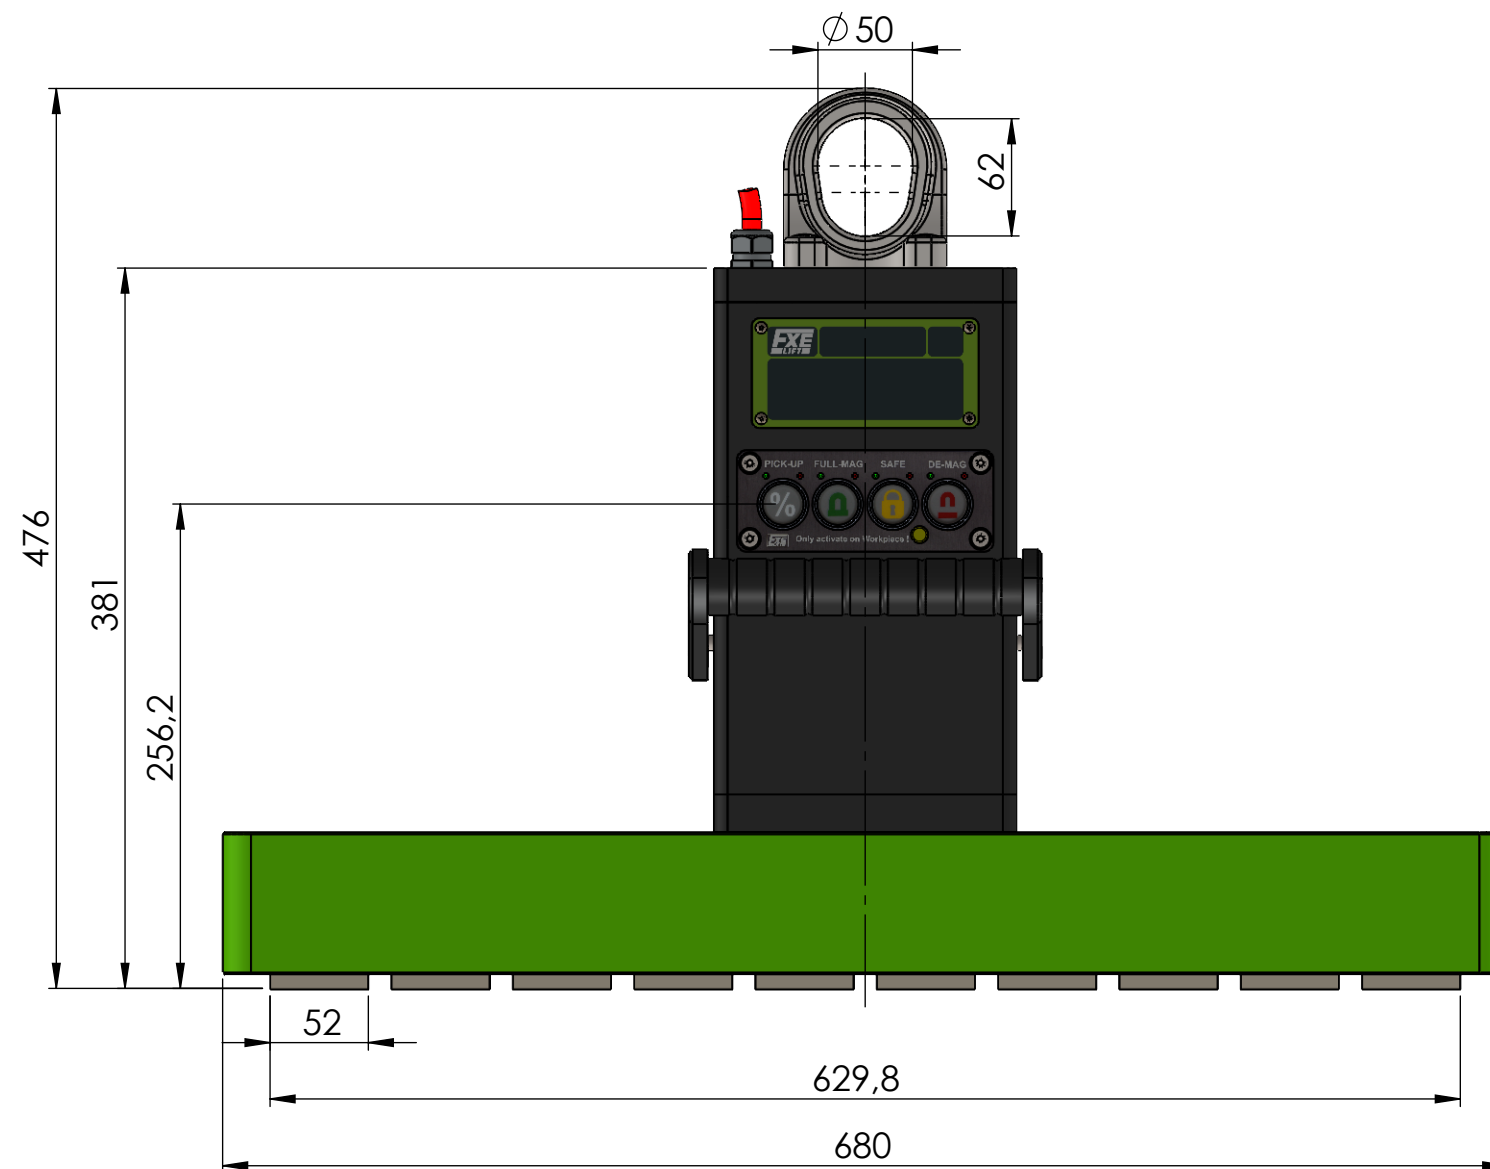


Specification FXE-L 1000-50+

Nominative Force: 38kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 1000kg
4,3 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 6,3Ω	Protectiv Earth SK I


Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	2500	1500	150
>=6mm	3000	1500	300
>=8mm	3000	1500	400
>=10mm	4000	1500	500
>=15mm	5000	1500	1000

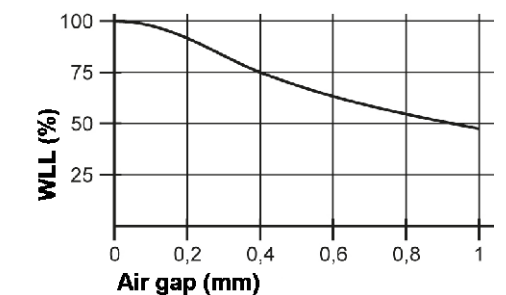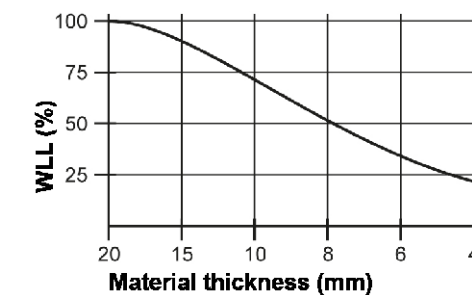

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 44.00

drawing no.: 0013753

description: FXE-L 1000-50+

part no.: 10601011

sheet 1 / 1

A3

scale: 1:4 Status: Freigegeben

rev.	change	date	name
03	Tabellenwerte	24.10.2023	TW
02	Ohm Wert	13.10.2023	TW

FLAIG
Magnetsysteme
www.flraig-te.de