
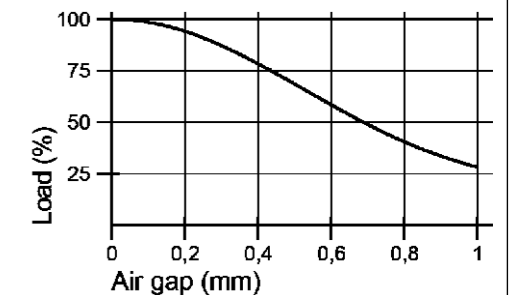


Specification FXE 1100-50

Nominative Force: 45,6kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 1100kg
3,5 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 7,8Ω	Protectiv Earth SK I

Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	2000	1500	200
>=6mm	3000	1500	370
>=8mm	3000	1500	600
>=10mm	3000	1500	900
>=15mm	3000	1500	1100

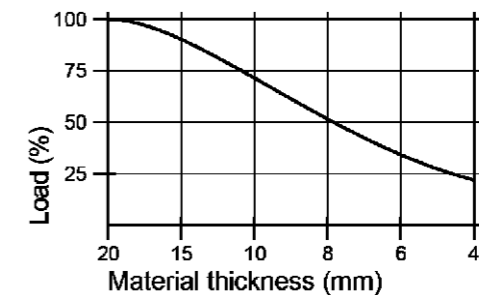

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!

3,2	-0,05	tolerance	material:	weight: 39kg
	-0,2	ISO 7168 M	drawing no.:	0018472
date	name	description: FXE 1100-50		
drawn 20.10.2023	TW			
edit 20.10.2023				
appr. 20.10.2023	TW			

FLAIG
Magnetsysteme
www.flraig-te.de

part no.:	10601101	sheet	1 / 1
scale:	1:4	Status:	Freigegeben