

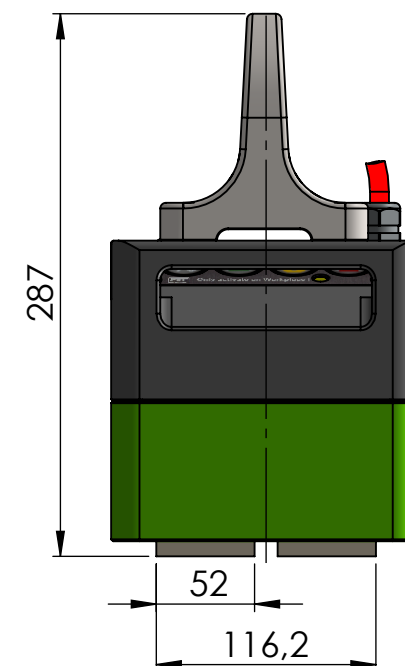
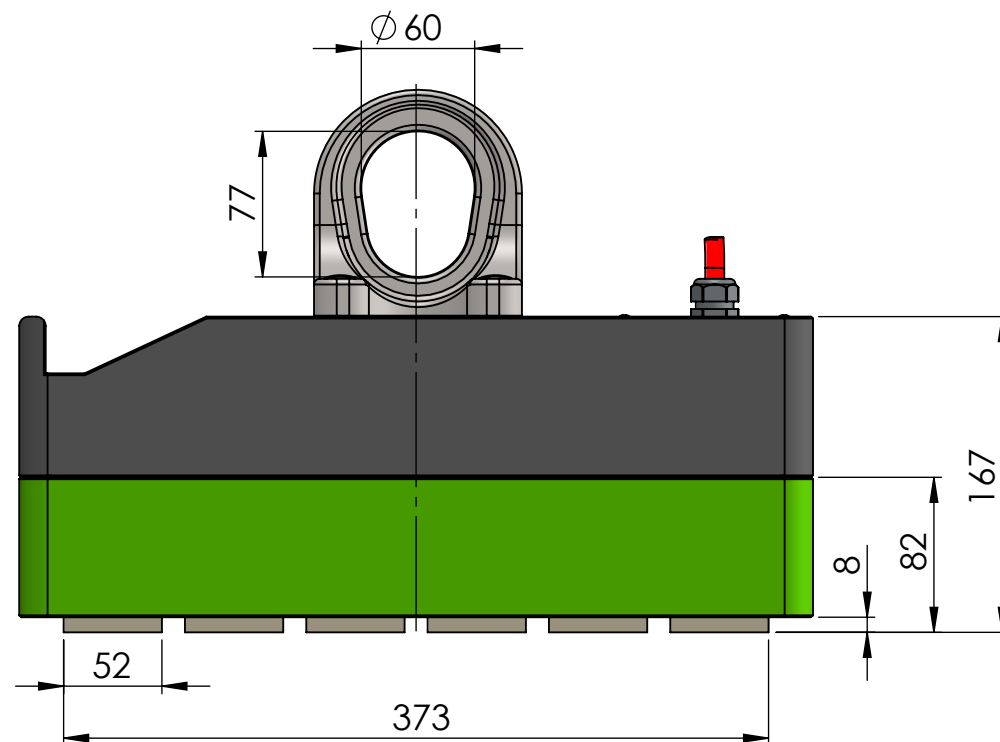


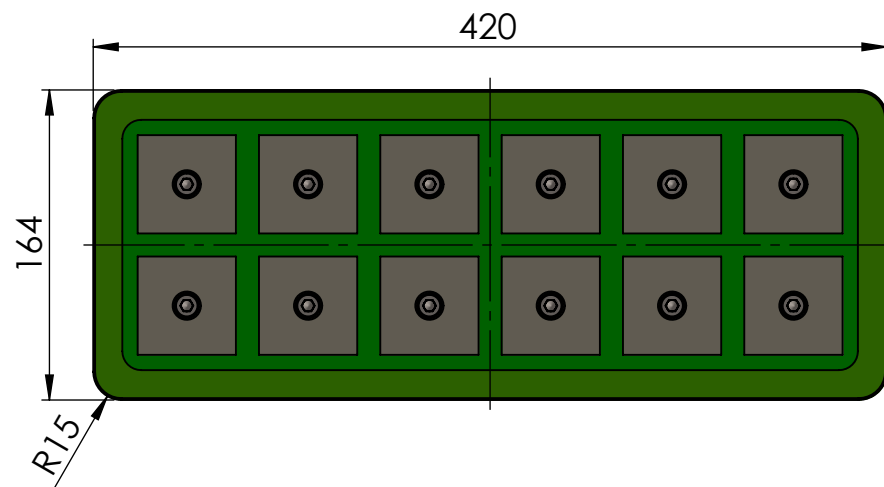

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

2m cable,
optional Spiral cable 1-5m


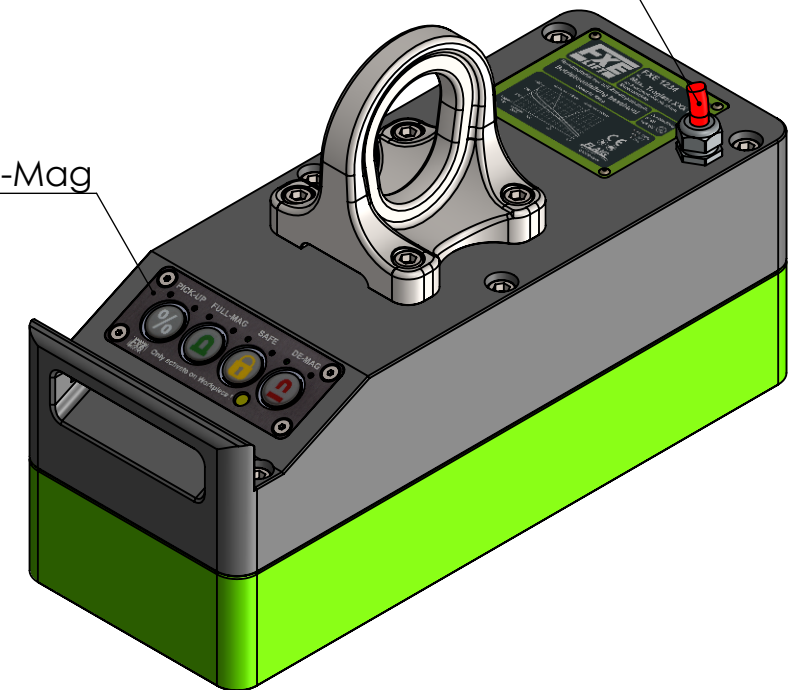


Specification FXE 1100-50+

Nominative Force: 45,6kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 1100kg
6,9 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 3,9Ω	Protectiv Earth SK I


Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	2000	1500	200
>=6mm	3000	1500	370
>=8mm	3000	1500	600
>=10mm	3000	1500	900
>=15mm	3000	1500	1100

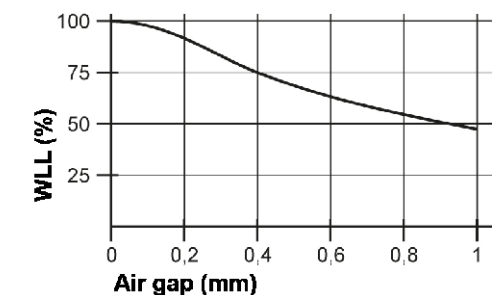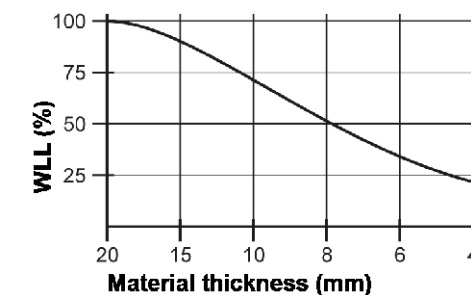

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 45.00

drawing no.: 0017025

description: FXE 1100-50+

part no.: 10601102

sheet 1 / 1

A3

scale: 1:4 Status: Freigegeben

FLAIG
Magnetsysteme
www.flraig-te.de

rev.	change	date	name
02	Tabellenwerte	20.10.2023	TW