

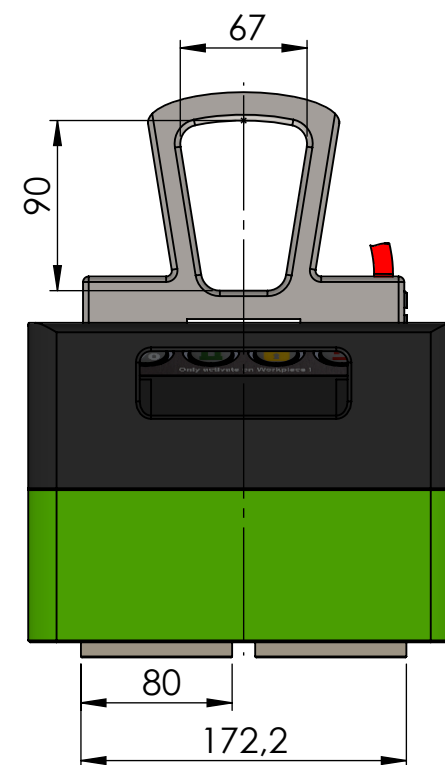
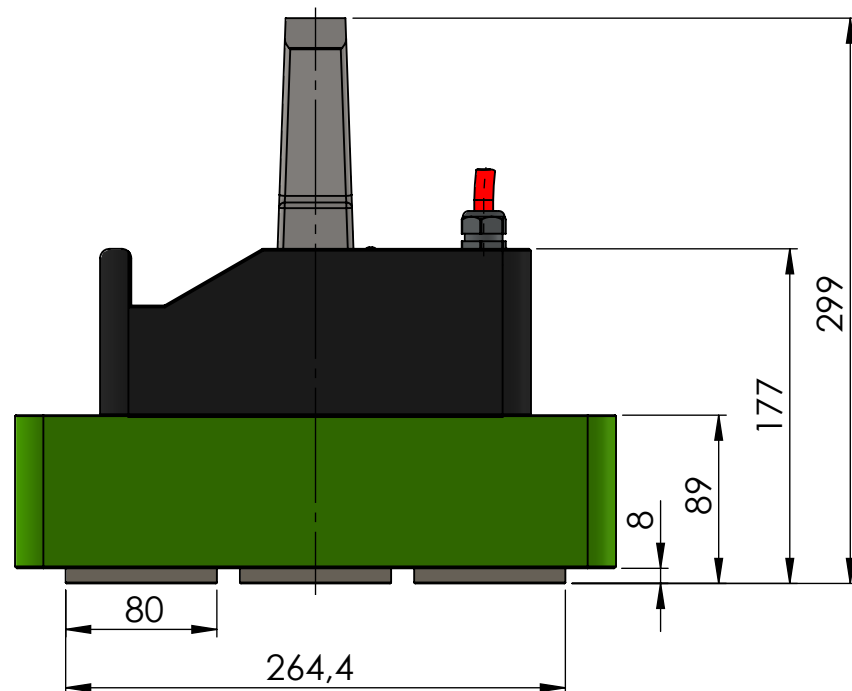



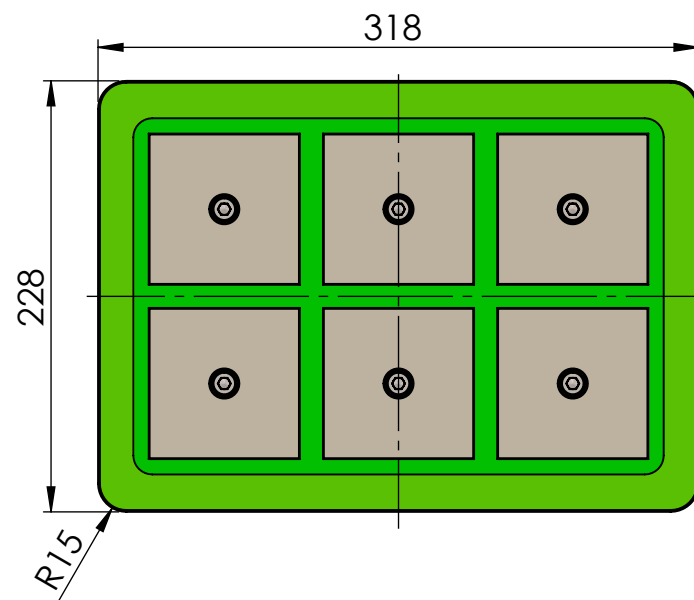


Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

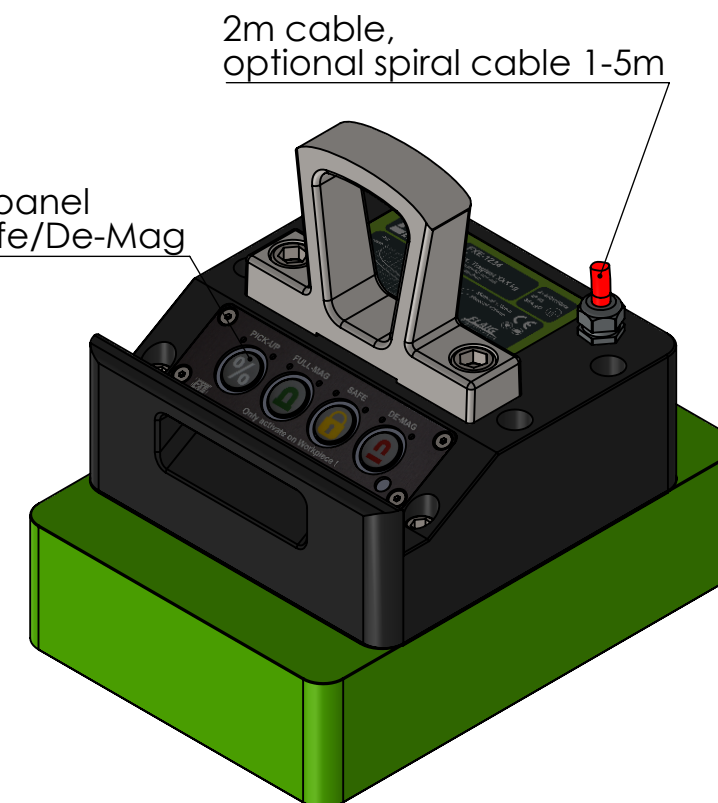

Specification FXE 1500-80

Nominative Force: 54kN	lifting capacity EN 13155/WLL		
Materialthickness >25mm (100%)	WLL= 1500kg		
6,8kVA			
U: 380-480V Pulse	Protection type IP 65		
R: 4Ω	Protection category SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=8mm	2000	1500	300
>=10mm	2500	1500	450
>=15mm	2500	1500	900
>=25mm	2500	2000	1500

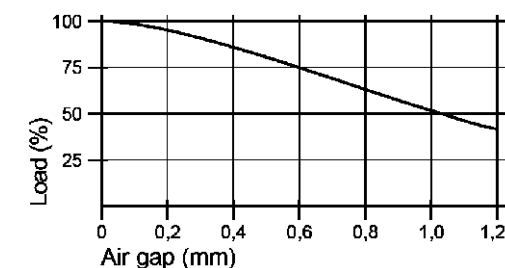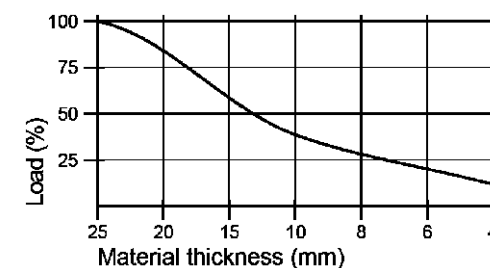

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!

3,2	-0,05 -0,2	tolerance	material:	weight: 52kg
		ISO 7168 M	drawing no.:	0018536
		date	name	
		drawn	26.10.2023	TW
		edit	26.10.2023	
		appr.	26.10.2023	TW

FLAIG
Magnetsysteme
www.flraig-te.de

description: FXE 1500-80		part no.:	10601502	sheet 1 / 1 A3
scale: 1:4		Status: Freigegeben		