
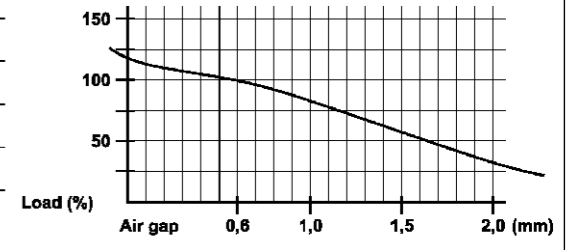


Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag


2m cable,
optional Spiral cable 1-5m

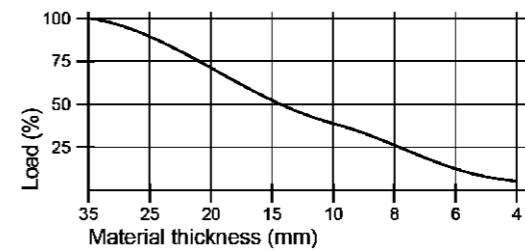

Specification FXE 2400-100

Nominative Force: 87kN		lifting capacity EN 13155/WLL	
Materialthickness >35mm (100%)		WLL= 2400kg	
15,9kVA			
U: 380-480V Pulse		Protection type IP 65	
R: 1,7Ω		Protection category SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	2000	1500	600
>=20mm	3000	2000	1500
>=35mm	3000	2000	2400

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO 7168 M

material: weight: 118kg

drawing no.: **0018544**

description: **FXE 2400-100**

date name

drawn 19.10.2023 TW

edit 27.06.2024

appr. 27.06.2024 TW



part no.: **10602403** sheet 1 / 1

scale: 1:5 Status: Freigegeben

02	Luftspaltkurve	27.06.2024	TW
rev.	change	date	name