
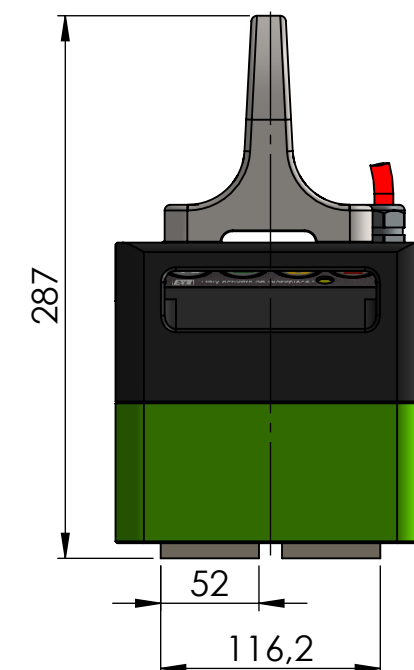
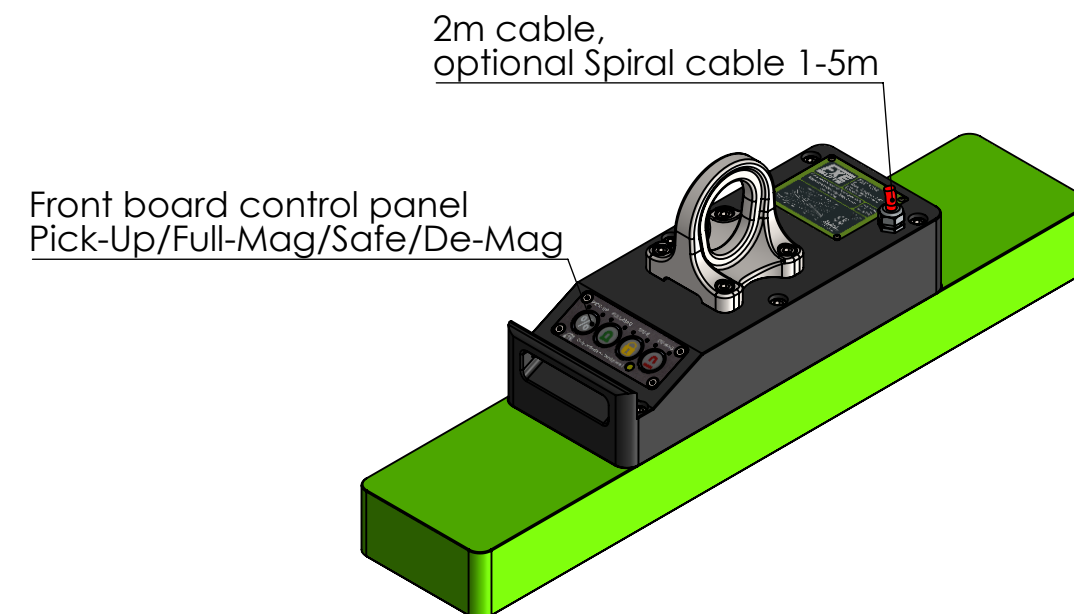
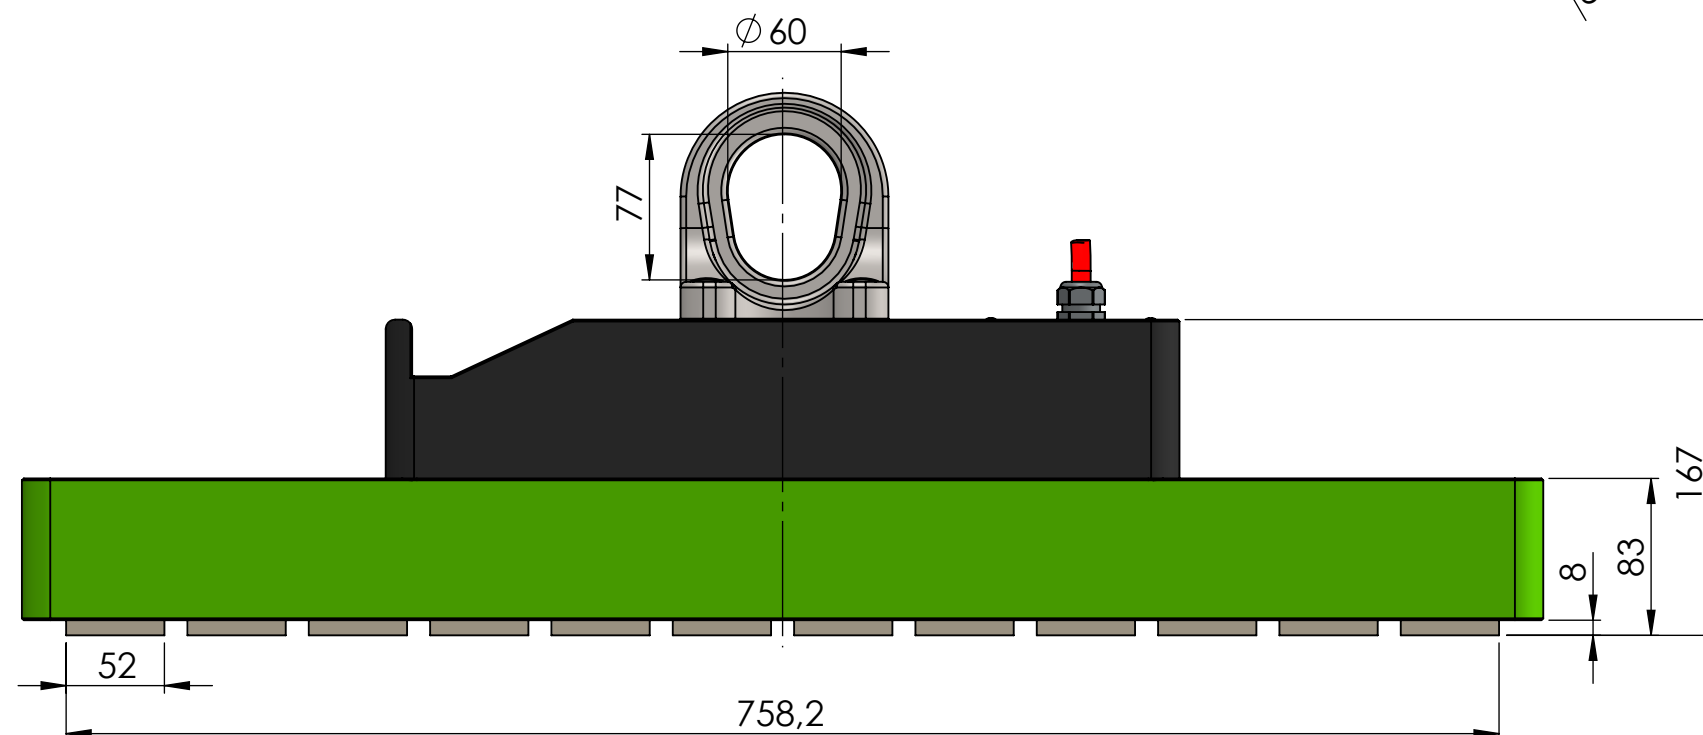
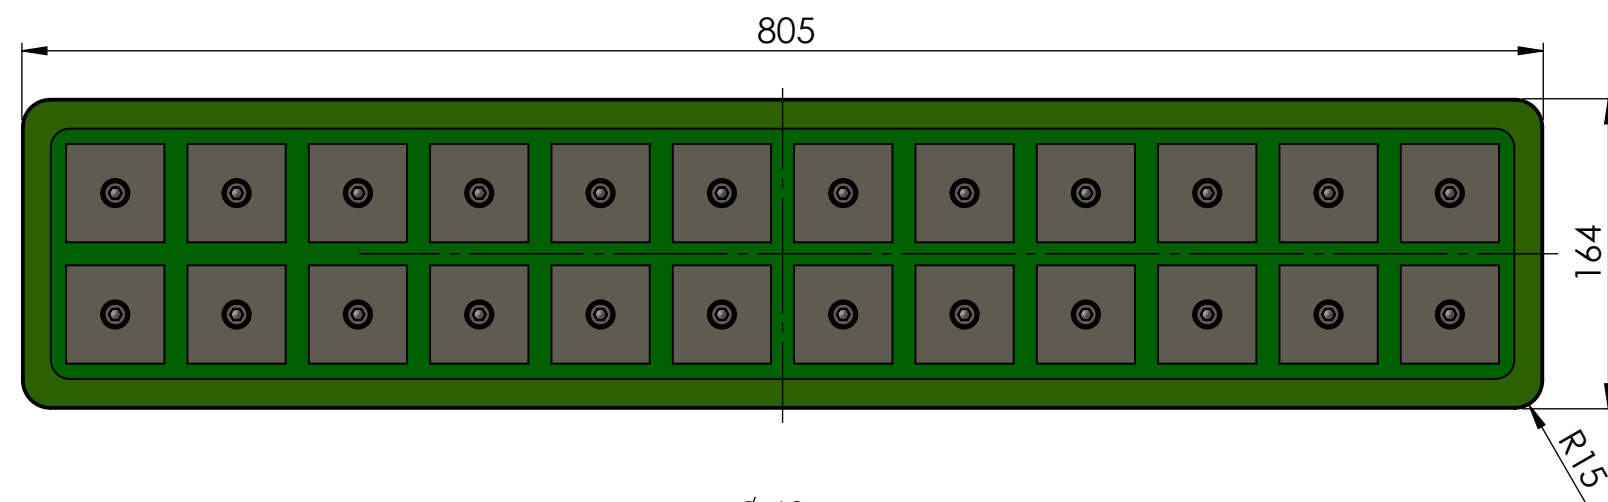


Specification FXE 2400-50+			
Nominative Force: 91,2kN		lifting capacity EN 13155/WLL	
Materialthickness >15mm (100%)		WLL= 2400kg	
13,5 kVA			
U: 380-480V Pulse		Protection Class IP 65	
R: 2Ω		Protectiv Earth SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	3000	1500	400
>=6mm	3000	2000	700
>=8mm	3000	2000	1200
>=10mm	3000	2000	2000
>=15mm	3000	2500	2500

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO 7168 M

material:	weight: 80
drawing no.:	0022713
description:	FXE 2400-50+
part no.:	10602411
scale: 1:4	Status: Freigegeben
sheet 1 / 1	A3

FLAIG
Magnetsysteme
www.flraig-te.de