
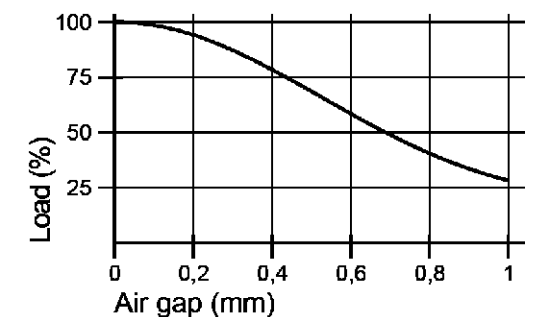
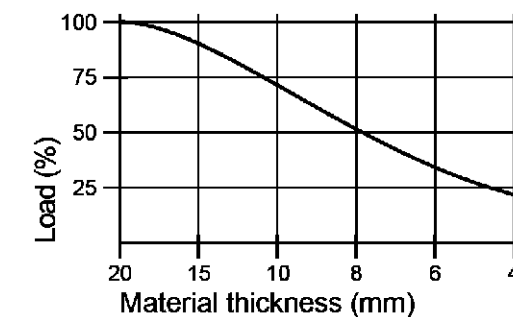
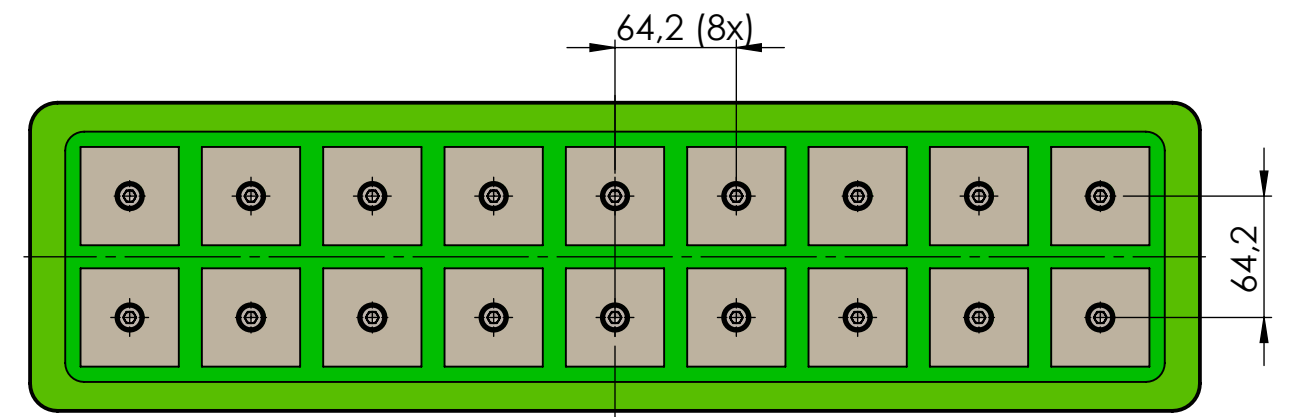
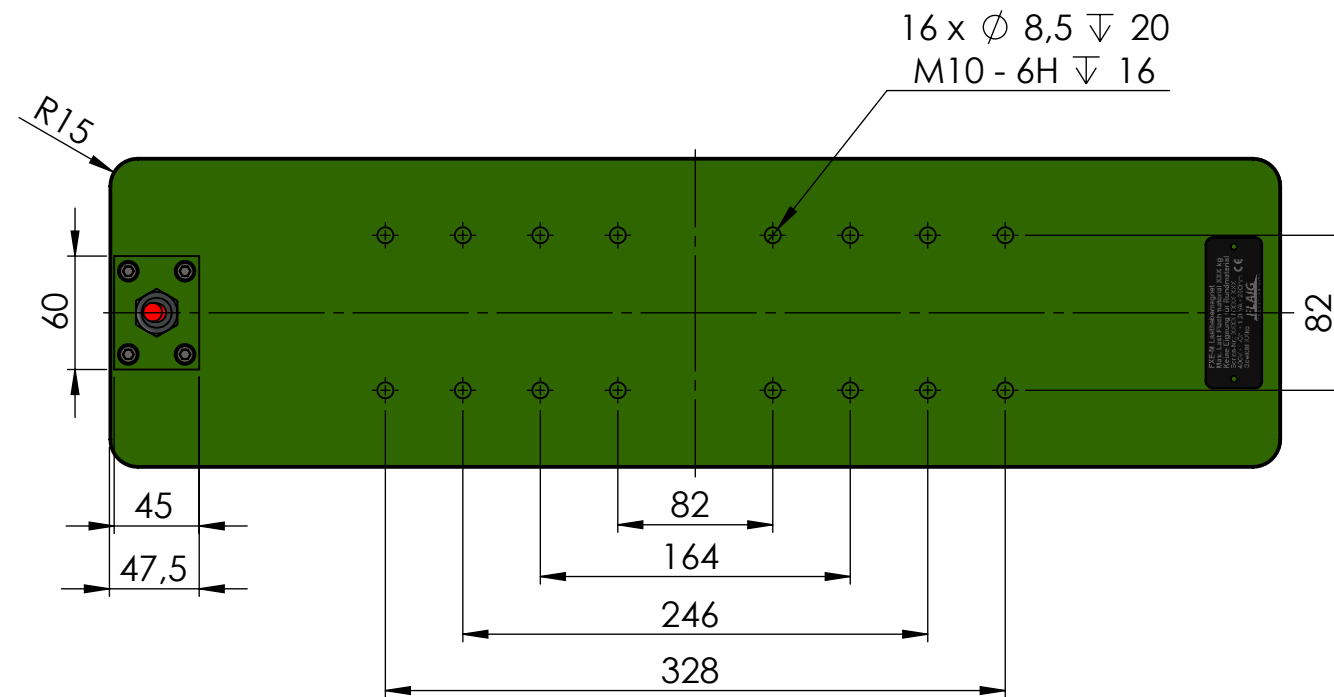
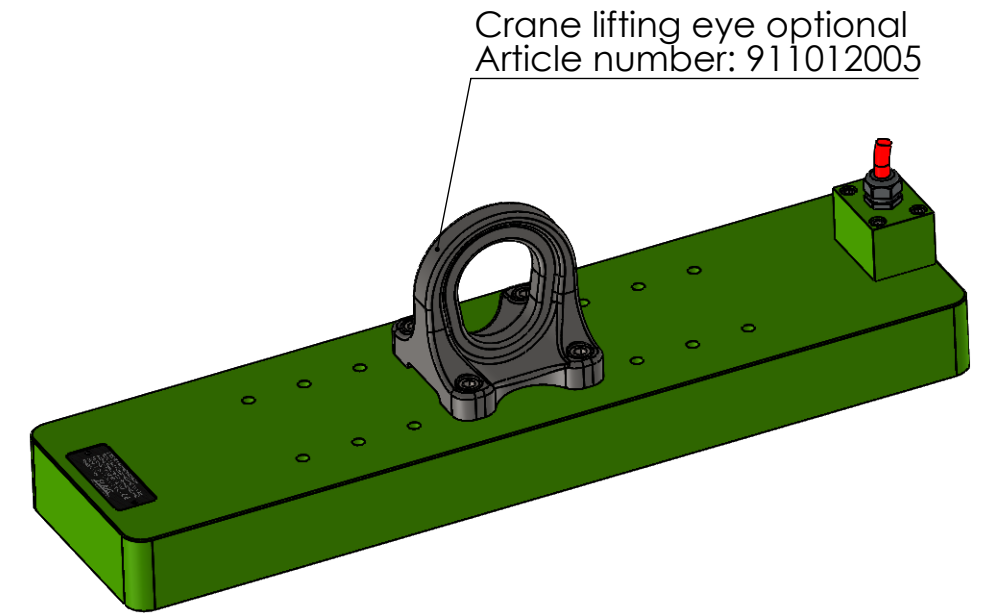
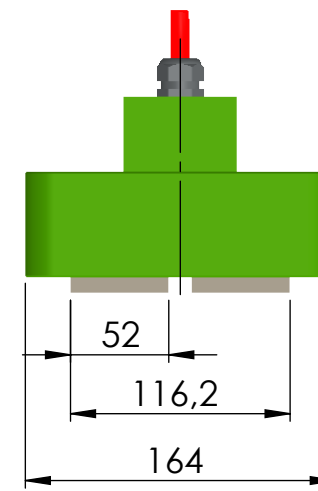


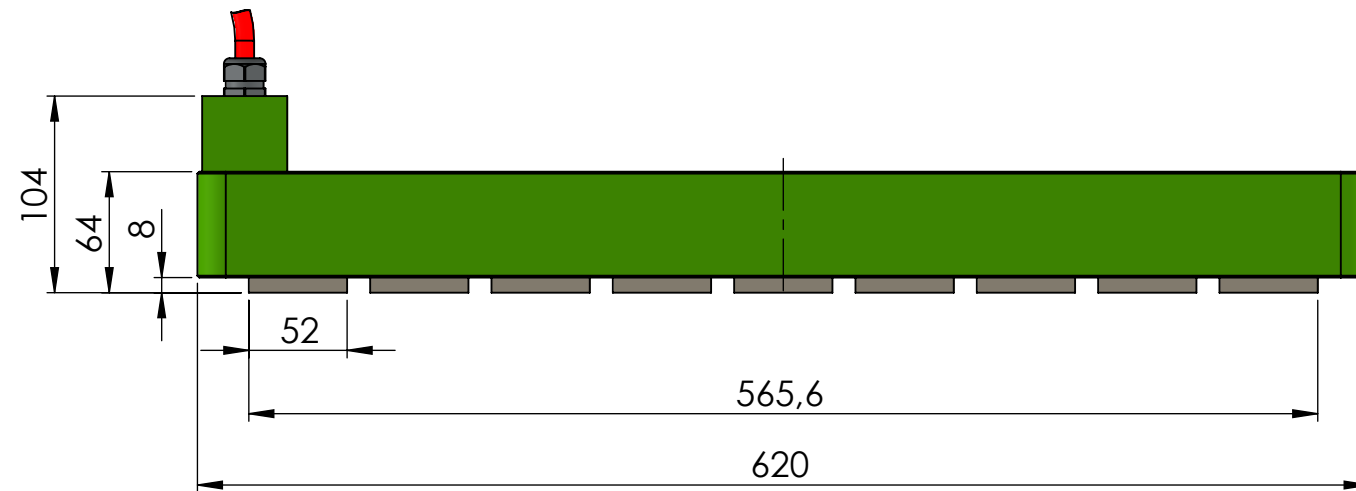

Specification FXE-M 1600-50		Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!				3,2 -0,05 -0,2		tolerance	material:		weight: 41.80		
								ISO 7168 M	drawing no.; 0013003				
Nominative Force: 68,4kN		lifting capacity EN 13155/WLL						date	name	description: FXE M 1600-50			
Materialthickness >15mm (100%)		1600kg						drawn	17.08.2022				TW
5,2kVA								edit	17.08.2022				
U: 380-480V Pulse		Protection Type IP 65						appr.	17.08.2022	TW	part no.: 10611601		
R: 5,2Ω		Protection category SK I						FLAIG Magnetsysteme www.flraig-te.de					
											sheet 1 / 1		
								A3					
											scale: 1:4		
								Status: Freigegeben					