

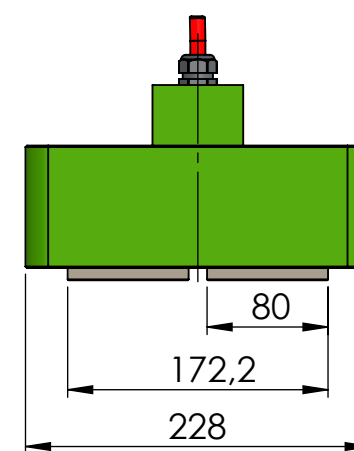
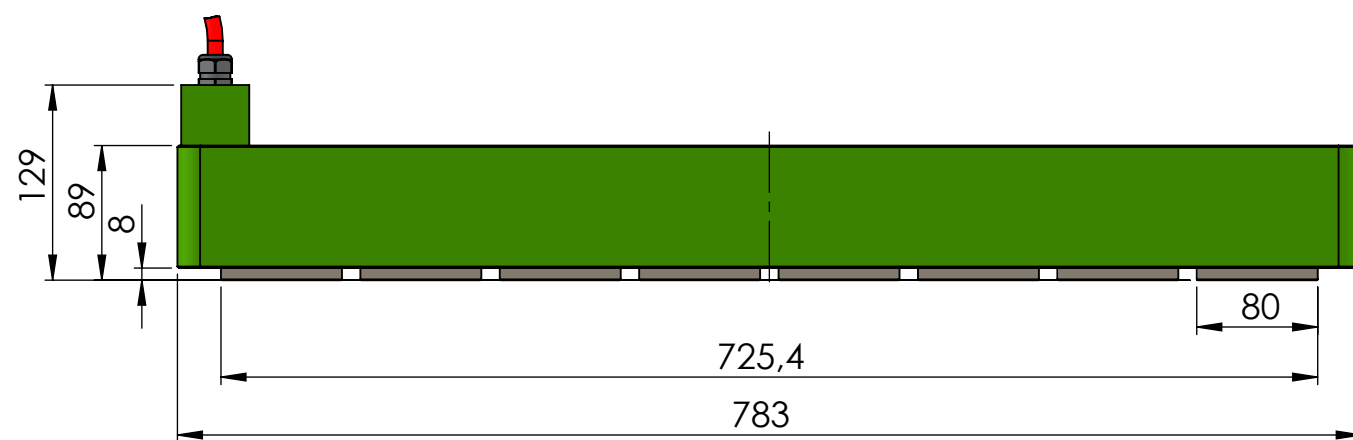
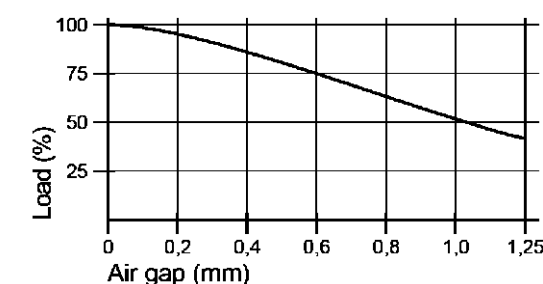
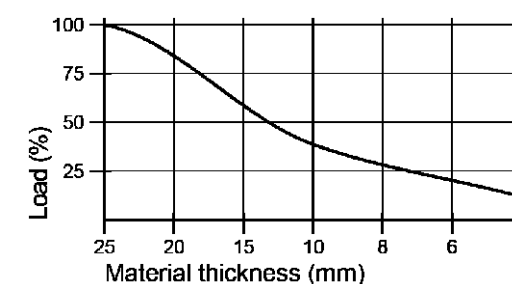
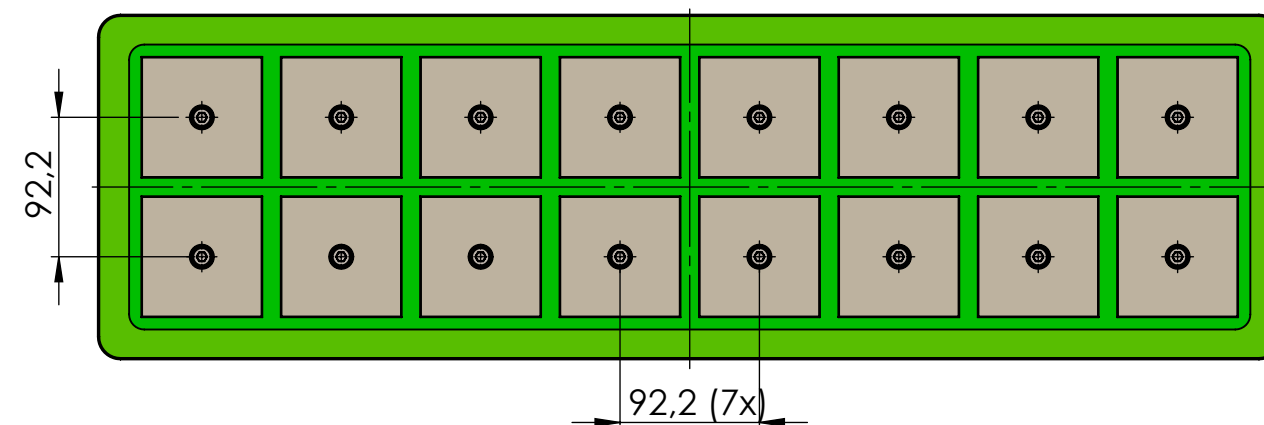


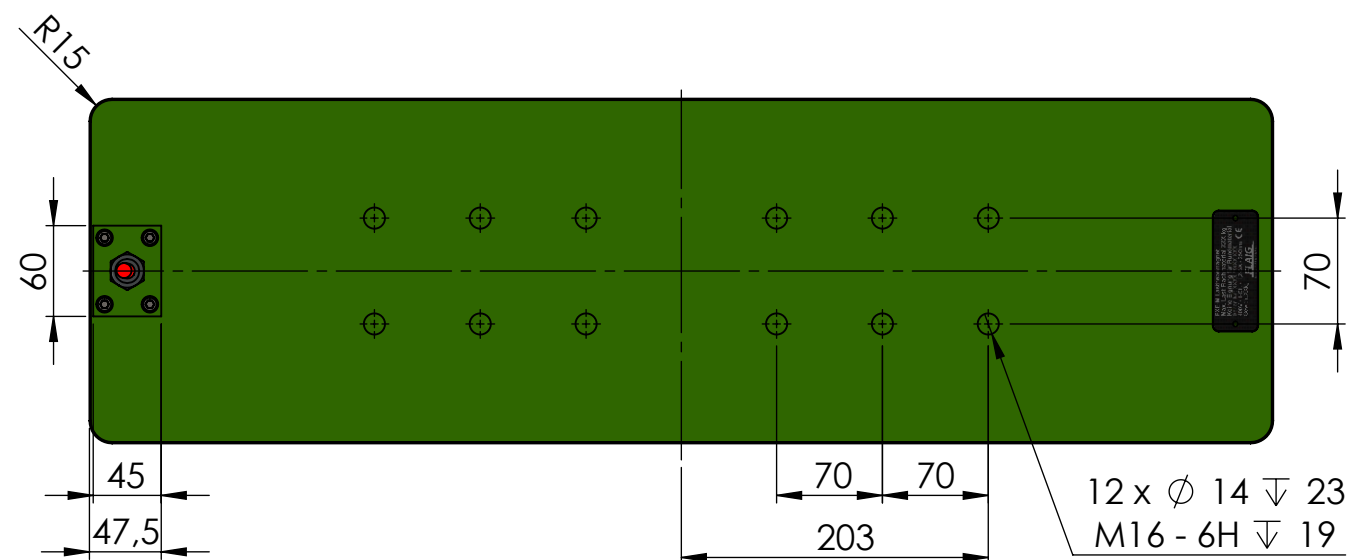

Crane lifting eyes optional
Article number: G1060AH-4

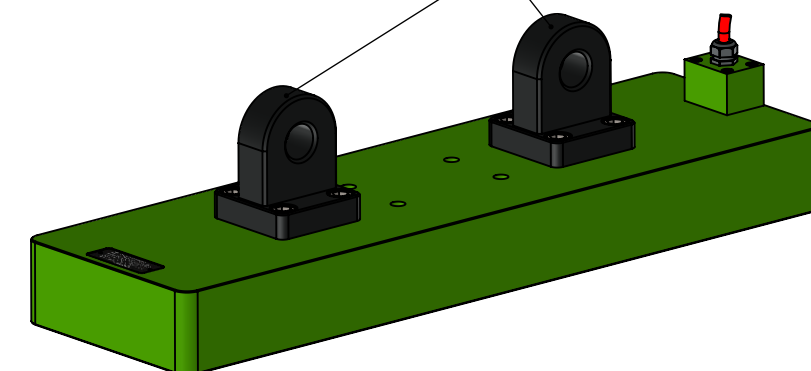

Specification FXE-M 4000-80		Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!		3,2 / -0,05 / -0,2		tolerance	material:	weight: 112.30
Nominative Force: 144kN	lifting capacity EN 13155/WLL			date		name	drawing no.:	0013196
Materialthickness >25mm (100%)	4000kg			drawn 22.08.2022		TW	description: FXE M 4000-80	
15kVA				edit 22.08.2022				
U: 380-480V Pulse	Protection Type IP 65			appr. 22.08.2022		TW		
R: 1,8Ω	Protection category SK I						part no.:	10614002
							scale: 1:5	sheet 1 / 1
							Status: Freigegeben	A3

FLAIG
Magnetsysteme
www.flaign-te.de