
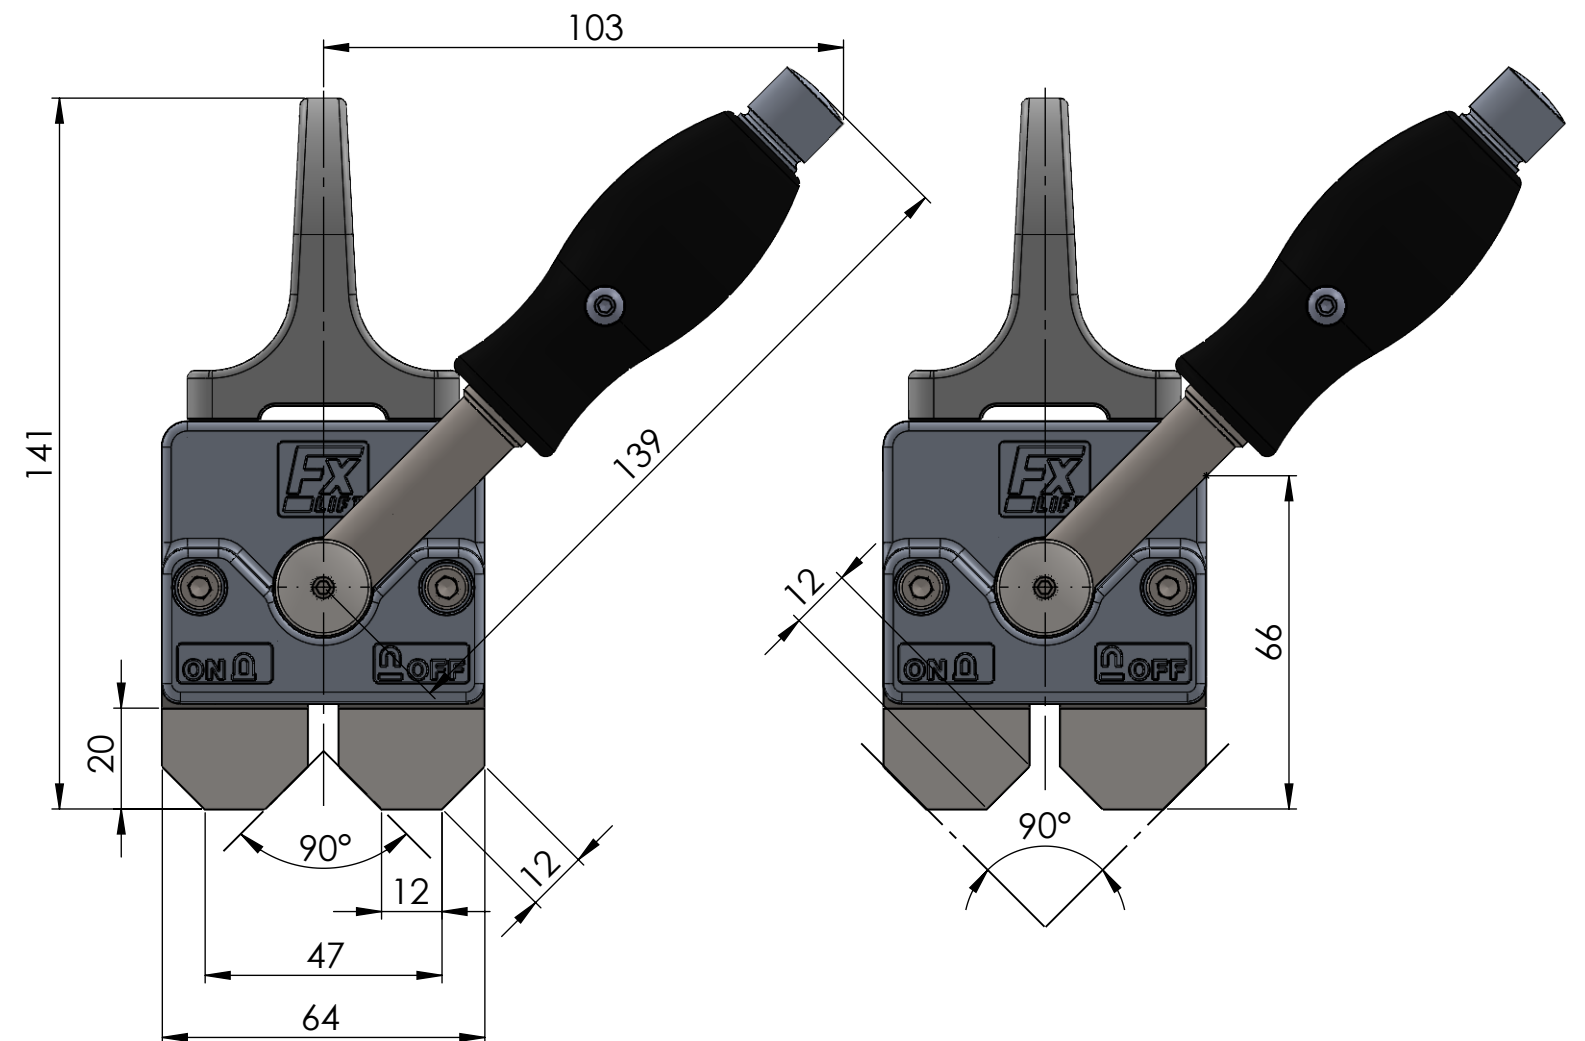
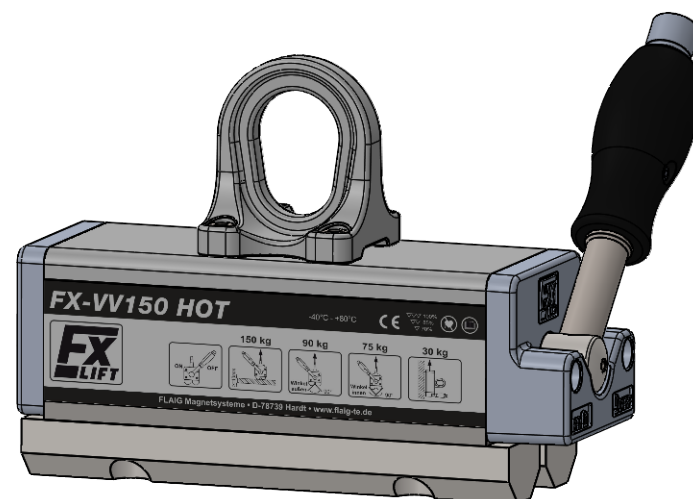
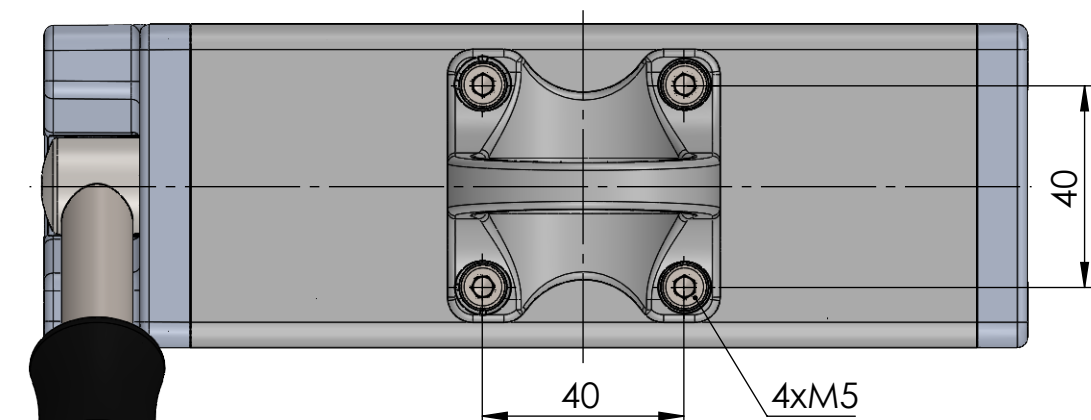


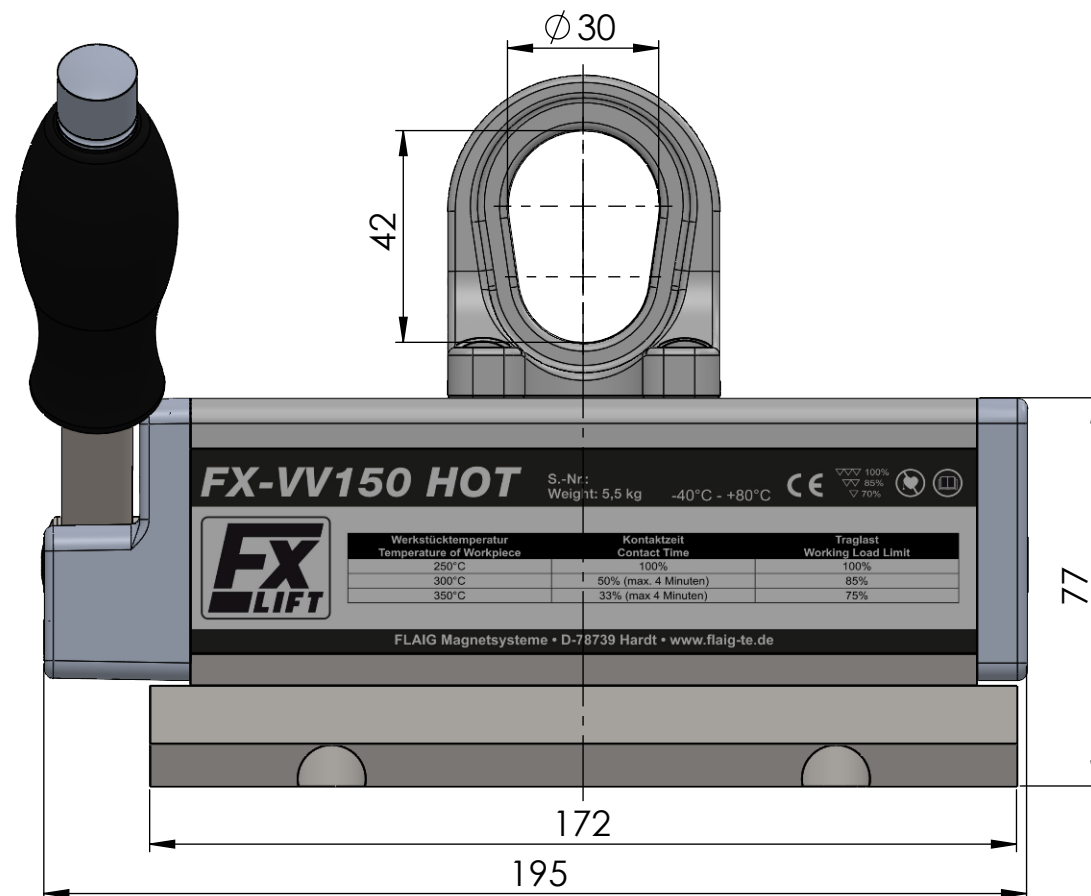

Load capacity according to EN 13155/WLL

Load capacity on flat material (from 10 mm material thickness): 150 kg

Load capacity on 90° profile outside/top: 90 kg

Load capacity on 90° profile inside/bottom: 75 kg

Workpiece temperature / contact time / load capacity:

-At 250°C 100% put on time / 100% load capacity

-At 300°C max. 50% put on time (contact time = cooling time, max. 4 minutes)
85% load capacity

-At 350°C max. 33% put on time (contact time = cooling time/2, max. 4 minutes)
75% load capacity

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!				tolerance		material:	weight: 5.50
All rights reserved according to DIN ISO 16016! Reprint with our permission only!				ISO 7168 M		drawing no.:	0018489
				date	name	description: FX-VV 150 HOT	
				drawn	TW		
				edit	18.12.2023		
				appr.	18.12.2023	part no.:	
				FLAIG Magnetsysteme www.flai-g-te.de		11010155-1	
03	Überarbeitet	18.12.2023	TW			sheet 1 / 1	
02	Bemaßung hinzu	20.11.2023	TW			A3	
rev.	change	date	name			scale: 1:1.5	Status: Freigegeben