
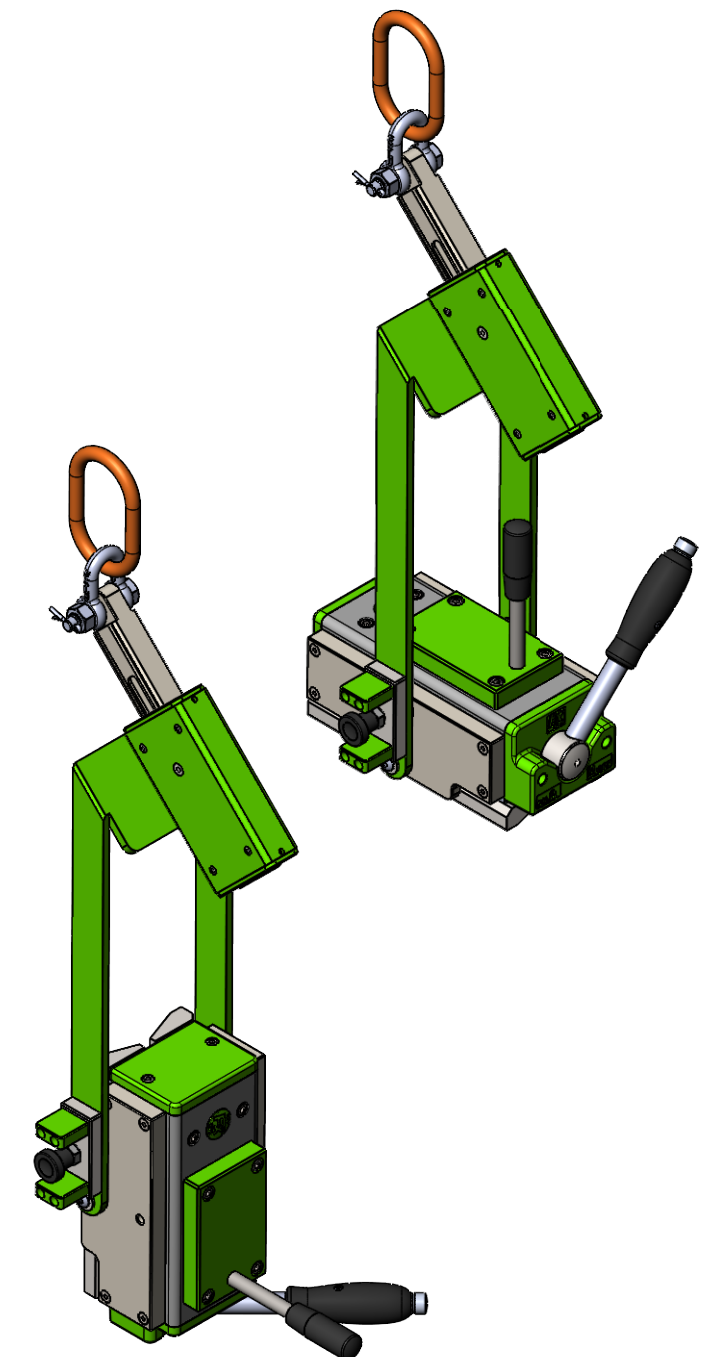
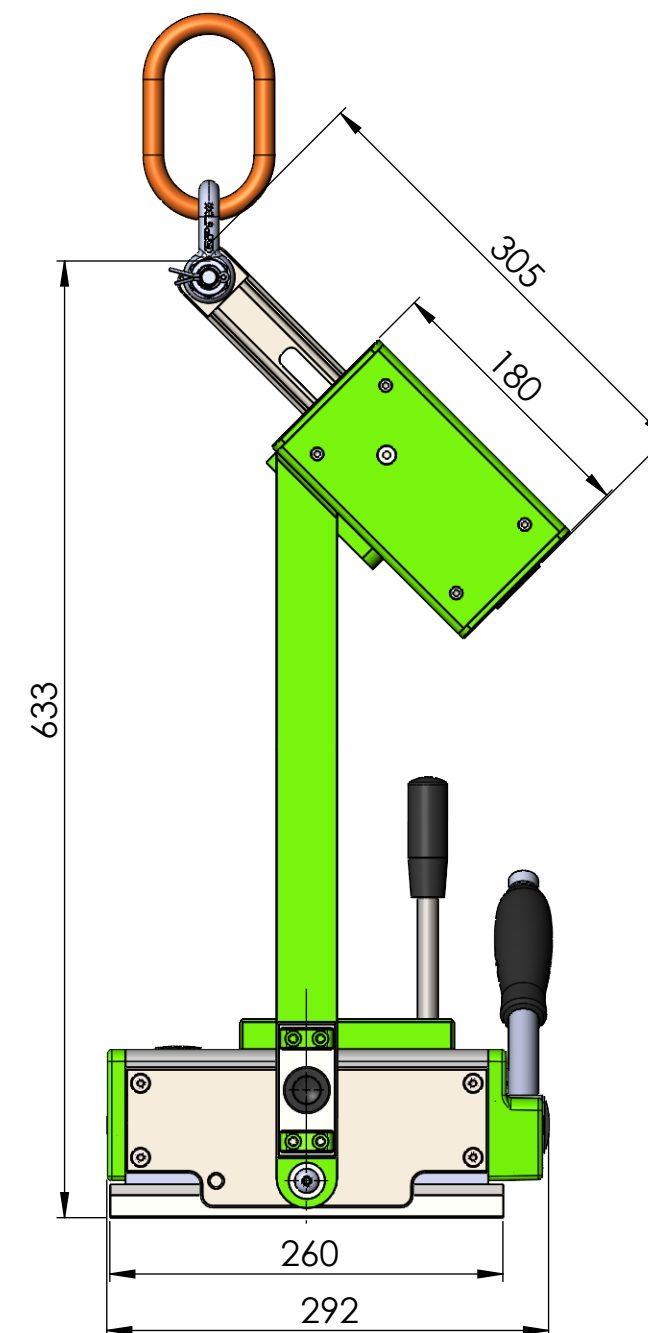


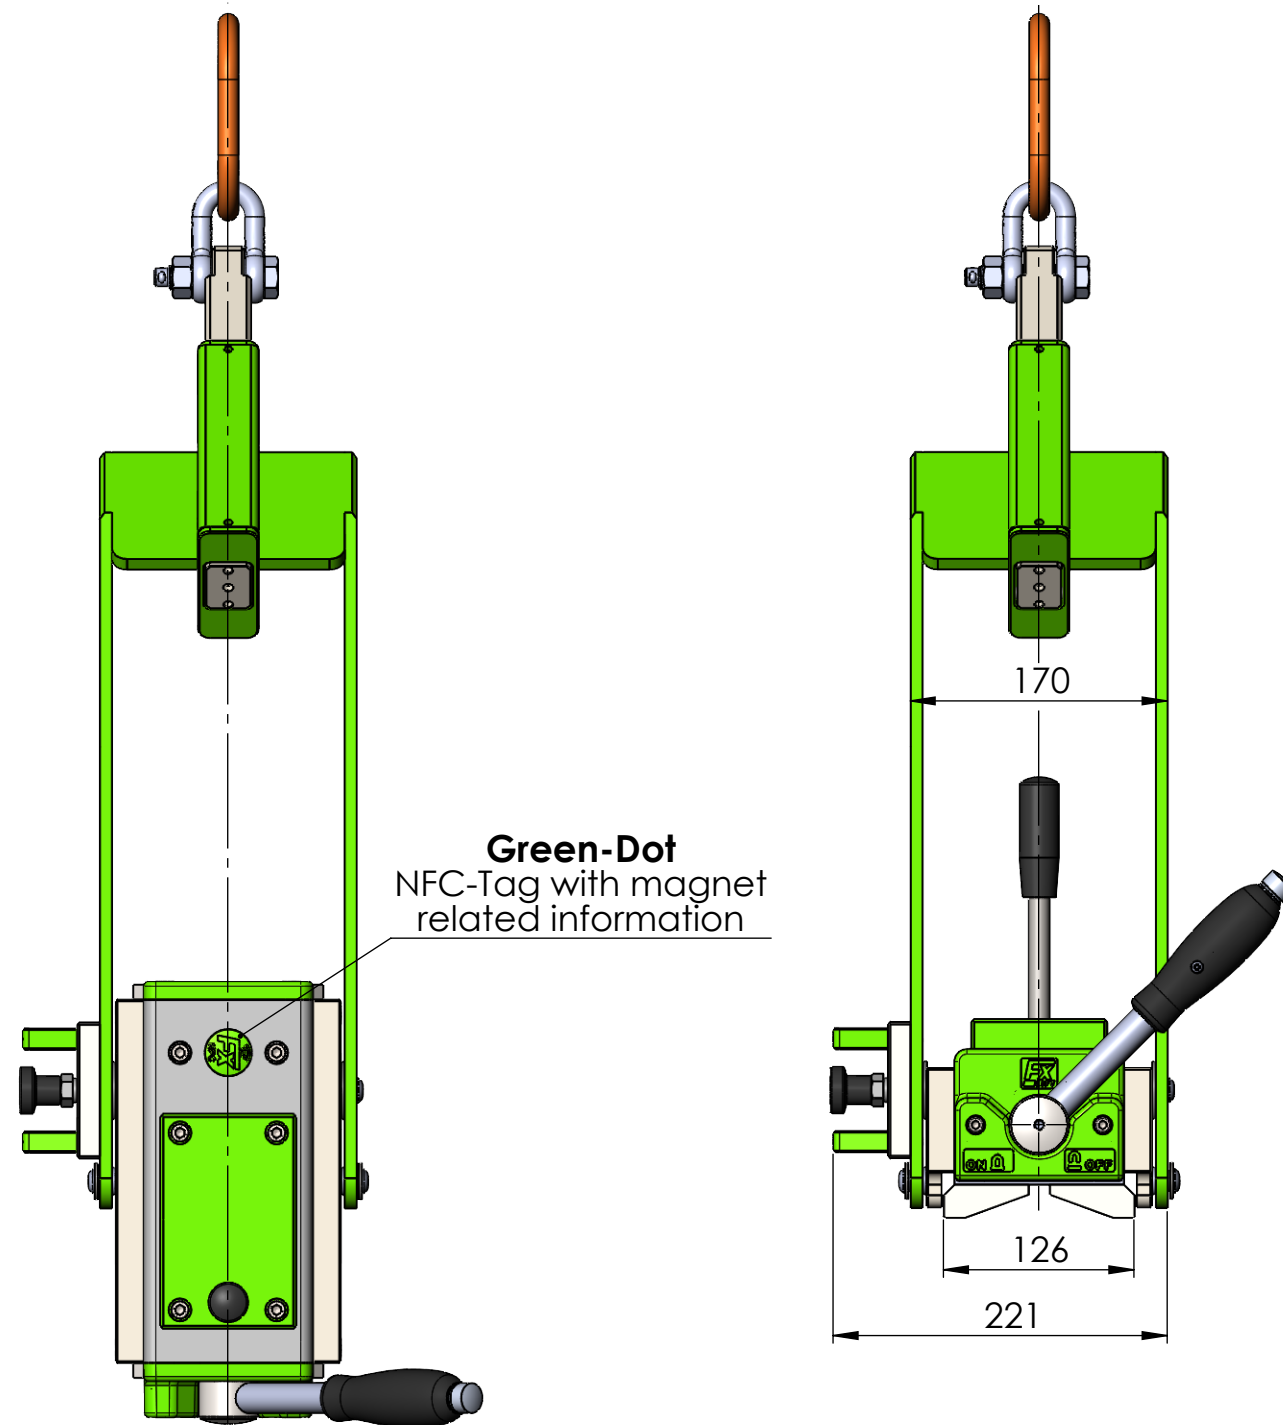

Max. load capacity flat, from 10mm material thickness:
 horizontal = 270 kg
 vertical = 90 kg
 Max. load capacity round Ø 50-270mm, from 20mm material thickness
 horizontal = 270 kg
 vertical = 90 kg
 At workpiece temperature 100°C - Max. contact time 100%
 At workpiece temperature 170°C - Max. contact time = 5 min. / 50%
 Contact time = cooling time at 30°C ambient temperature

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!				tolerance		material:	weight: 35.00 kg
All rights reserved according to DIN ISO 16016! Reprint with our permission only!				ISO 7168 M		drawing no.:	0013158
				date		name	description: FX-HVS R450
				drawn		FEU	
				edit		15.02.2024	
				appr.		15.02.2024	Horizontal-vertical slewing magnet
07	Green Dot	01.02.2024	TW				part no.: 11030451
06	Griff+Gewinde M12	11.12.2023	TW				
05	Ganter griff	25.10.2023	FEU				
04	Rastung	25.07.2022	FEU				sheet 1 / 1
03	Hebel max500	30.06.2022	FEU				
02	Rohraufsatz	23.06.2022	TW				
rev.	change	date	name				A3
						scale: 1:5	Status: Freigegeben

FLAIG
Magnetsysteme
www.flraig-te.de